

(12)

**EUROPEAN PATENT APPLICATION**

published in accordance with Art. 158(3) EPC

(21) Application number: 87905645.5

(61) Int. Cl.<sup>3</sup>: **C 08 F 10/00**  
**C 08 F 4/64**

(22) Date of filing: 26.08.87

Data of the international application taken as a basis:

(86) International application number:  
PCT/JP87/00629

(87) International publication number:  
WO88/01626 (10.03.88 88/06)

(30) Priority: 26.08.86 JP 198037/86  
26.08.86 JP 198038/86  
01.09.86 JP 203638/86  
19.02.87 JP 34591/87

(43) Date of publication of application:  
31.08.88 Bulletin 88/35

(84) Designated Contracting States:  
AT DE FR GB IT NL

(71) Applicant: MITSUI PETROCHEMICAL INDUSTRIES, LTD.  
2-5, Kasumigasaki 3-chome Chiyoda-ku  
Tokyo 100(JP)

(72) Inventor: KIOKA, Mamoru  
2-3, Muronoki-cho 1-chome Iwakuni-shi  
Yamaguchi 740(JP)

(72) Inventor: TOYOTA, Akinori  
103-21, Minamiwakuni-cho 2-chome Iwakuni-shi  
Yamaguchi 740(JP)

(72) Inventor: KASHIWA, Norio  
2-9, Muronoki-cho 1-chome Iwakuni-shi  
Yamaguchi 740(JP)

(72) Inventor: TSUTSUI, Toshiyuki  
3-6, Misono 1-chome Ohtake-shi  
Hiroshima 739-06(JP)

(74) Representative: Myerscough, Philip Boyd et al.  
J.A.Kemp & Co. 14, South Square Gray's Inn  
London, WC1R 5EU(GB)

(54) CATALYST FOR POLYMERIZING -g(a)-OLEFIN AND POLYMERIZATION PROCESS.

(57) The catalyst for polymerizing  $\alpha$ -olefin comprises a component of a carrier having provided thereon a transition metal compound and an aluminosilicate. The carrier is one having been treated with an organometallic compound, a halogen-containing silicon compound or an aluminosilicate or an olefin prepolymer prepared by using these two components. The catalyst enables production of a spherical polymer having good particle size distribution and excellent bulk density when employed in slurry polymerization process or gas phase polymerization process, particularly in the latter process. In addition, the catalyst provides a polymer having a narrow molecular weight distribution and, when applied to copolymerization of two or more olefins, it shows such an excellent polymerization activity that it provides an olefin copolymer having a narrow molecular weight distribution and a narrow composition distribution.

**EP 0 279 863 A1**

- 1 -

## SPECIFICATION

CATALYST FOR POLYMERIZING ALPHA-OLEFINS AND  
PROCESS FOR POLYMERIZATION

## TECHNOLOGICAL FIELD

5           This invention relates to a catalyst for polymerization of alpha-olefins, and to a polymerization process. More specifically, it relates to a catalyst for polymerization of alpha-olefins which by a slurry polymerization method or a vapor-phase polymerization method,  
10 particularly the latter, can give a spherical polymer having a good particle size distribution and an excellent bulk density, and to a polymerization process using the aforesaid catalyst. Furthermore, it relates to a catalyst for polymerization of alpha-olefins which when  
15 applied to the copolymerization of at least two olefins, exhibits high polymerization activity and gives an olefin copolymer having a narrow molecular weight distribution and a narrow composition distribution, and to a polymerization process using the catalyst.

## 20           BACKGROUND TECHNOLOGY

For the production of an alpha-olefin polymer, particularly an ethylene polymer or an ethylene/alpha-olefin copolymer, methods have previously been known in which ethylene is polymerized, or ethylene and an alpha-olefin are copolymerized, in the presence of a titanium-containing catalyst comprising a titanium compound and an  
25 organoaluminum compound or a vanadium-containing catalyst comprising a vanadium compound and an organoaluminum compound.

30           On the other hand, catalysts comprising a zirconium compound and an aluminoxane have been proposed recently as a new type of Ziegler catalyst for olefin polymerization.

Japanese Laid-Open Patent Publication No.  
35 19309/1983 discloses a process which comprises polymerizing ethylene and at least one alpha-olefin having 3 to 12


- 2 -

carbon atoms at a temperature of  $-50^{\circ}\text{C}$  to  $200^{\circ}\text{C}$  in the presence of a catalyst composed of a transition metal-containing catalyst represented by the following formula




wherein  $\text{R}^1$  represents cyclopentadienyl,  $\text{C}_1\text{-C}_8$  alkyl or halogen, Me represents a transition metal, and Hal represents halogen,

with a linear aluminoxane represented by the following  
10 formula



wherein  $\text{R}^2$  represents methyl or ethyl, and  $n$  is a number of 4 to 20,


or a cyclic aluminoxane represented by the following  
15 formula



wherein  $\text{R}^2$  and  $n$  are as defined above.


This patent document states that in order to adjust the density of the resulting polyethylene,  
20 ethylene should be polymerized in the presence of a small amount (up to 10 % by weight) of a slightly long-chain alpha-olefin or a mixture thereof.

Japanese Laid-Open Patent Publication No. 95292/1984 describes an invention relating to a process  
25 for producing a linear aluminoxane represented by the following formula

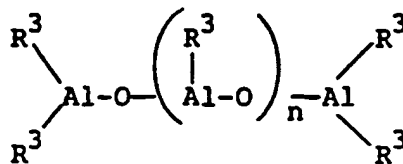

- 3 -


wherein n is 2 to 40 and  $R^3$  is  $C_1-C_8$  alkyl, and a cyclic aluminosiloxane represented by the following formula



5 wherein n and R are as defined above.

This Publication states that when an olefin is polymerized using a mixture of methylaluminosiloxane produced by the above process with a bis(cyclopentadienyl) compound of titanium or zirconium, polyethylene is obtained in an amount of at least 25 million grams per gram of the transition metal per hour.

Japanese Laid-Open Patent Publication No. 35005/1985 discloses a process for producing a catalyst for polymerization of olefins, which comprises reacting an aluminosiloxane compound represented by the following formula



wherein  $R^4$  represents  $C_1-C_{10}$  alkyl, and  $R^O$  is  $R^4$  or is bonded to represent -O-, with a magnesium compound, then chlorinating the reaction product, and treating the chlorinated product with a compound of Ti, V, Zr or Cr. The above Publication describes that the above catalyst is especially suitable for the copolymerization of ethylene with a  $C_3-C_{12}$  alpha-olefin mixture.

- 4 -

Japanese Laid-Open Patent Publication No.


35006/1985 discloses a combination of (a) a mono-, di- or tri-pentadienyl compound of at least two dissimilar transition metals or its derivative with (b) alumoxane (aluminoxane) as a catalyst system for polymers blended in a reactor. Example 1 of this Publication discloses that polyethylene having a number average molecular weight of 15,300 and a weight average molecular weight of 36,400 and containing 3.4 % of a propylene component was obtained by polymerizing ethylene and propylene using bis(pentamethylcyclopentadienyl) dimethyl zirconium and alumoxane as a catalyst. In Example 2 of this Publication, a blend consisting of polyethylene and an ethylene/propylene copolymer and having a number average molecular weight of 2,000, a weight average molecular weight of 8,300 and a propylene component content of 7.1 mole % and consisting of a toluene-soluble portion having a number average molecular weight of 2,200, a weight average molecular weight of 11,900 and a propylene component content of 30 mole % and a toluene-insoluble portion having a number average molecular weight of 3,000, a weight average molecular weight of 7,400 and a propylene component content of 4.8 mole % was obtained by polymerizing ethylene and propylene using bis(pentamethylcyclopentadienyl)zirconium dichloride, bis(methylcyclopentadienyl)zirconium dichloride and alumoxane as a catalyst. Likewise, Example 3 of this Publication describes a blend of LLDPE and an ethylene/propylene copolymer composed of a soluble portion having a molecular weight distribution ( $\bar{M}_w/\bar{M}_n$ ) of 4.57 and a propylene component content of 20.6 mole % and an insoluble portion having a molecular weight distribution of 3.04 and a propylene component content of 2.9 mole %.

Japanes Laid-Open Patent Publication No.


35 35007/1985 describes a process which comprises polymerizing ethylene alone or with an alpha-olefin having

- 5 -

at least 3 carbon atoms in the presence of a catalyst system comprising a metallocene and a cyclic alumoxane represented by the following formula



- 5            wherein  $\text{R}^5$  represents an alkyl group having 1 to 5 carbon atoms, and  $n$  is an integer of 1 to about 20,  
or a linear alumoxane represented by the following formula



- 10            wherein  $\text{R}^5$  and  $n$  are as defined above.  
The Publication describes that the polymer obtained by the above process has a weight average molecular weight of about 500 to about 1,400,000 and a molecular weight distribution of 1.5 to 4.0.

- 15            Japanese Laid-Open Patent Publication No. 35008/1985 describes that polyethylene or a copolymer of ethylene and a  $\text{C}_3$ - $\text{C}_{10}$  alpha-olefin having a wide molecular weight distribution is produced by using a catalyst system comprising at least two types of  
20 metallocenes and alumoxane. The Publication states that the above copolymer has a molecular weight distribution ( $\bar{M}_w/\bar{M}_n$ ) of 2 to 50.

- These catalysts formed from transition metal compounds and aluminosiloxanes have much higher polymeriza-  
25 tion activity than the catalyst systems known heretofore.

- On the other hand, methods using catalysts formed from solid catalyst components composed of the above transition metal compounds supported on porous inorganic oxide carriers such as silica, silica-alumina  
30 and alumina and aluminosiloxanes are proposed in Japanese

- 6 -

Laid-Open Patent Publications Nos. 35006/1985, 35007/1985 and 35008/1985 which are cited above. Japanese Laid-Open Patent Publications Nos. 31404/1986, 108610/1986 and 106808/1985 propose methods using solid catalyst components supported on similar porous inorganic oxide carriers.

It is an object of this invention to provide a catalyst for polymerizing alpha-olefins, which has excellent polymerization activity and gives an ethylene polymer or an ethylene/alpha-olefin copolymer having excellent powder characteristics and a narrow molecular weight distribution or composition distribution, and when applied to the copolymerization of at least two olefins, gives an olefin copolymer having a narrow molecular weight distribution and composition distribution.

Another object of this invention is to provide a process for producing an ethylene polymer or an ethylene/alpha-olefin copolymer having the aforesaid properties by polymerizing or copolymerizing alpha-olefins using the catalyst of this invention.

According to this invention, these objects and advantages are firstly achieved by a catalyst for polymerization of alpha-olefins, said catalyst being formed by using a solid catalyst comprising

(A) a solid catalyst component composed of a compound of a transition metal of Group IVB of the periodic table supported on a carrier, and

(B) an aluminoxane, in pre-polymerization of an olefin.

The catalyst of this invention is formed from the solid catalyst component (A) and the aluminoxane (B).

The catalyst component (A) is a solid catalyst component composed of a compound of a transition metal of Group IVB of the periodic table supported on a carrier.

The transition metal of Group IVB of the peri-

- 7 -

odic table in the catalyst component (A) is preferably selected from the group consisting of titanium, zirconium and hafnium. Titanium and zirconium are more preferred, and zirconium is especially preferred.

- 5           The compound of a transition metal of Group IVB of the periodic table in the catalyst component (A) preferably has a group having a conjugated  $\pi$  electron as a ligand.

- Examples of the transition metal compound  
10   having a group with a conjugated  $\pi$  electron as a ligand are compounds represented by the following formula (I)



- wherein  $R^1$  represents a cycloalkadienyl group,  $R^2$ ,  $R^3$  and  $R^4$  are identical or different and each represents a  
15   cycloalkadienyl group, an aryl group, an alkyl group, a cycloalkyl group, an aralkyl group, a halogen atom, a hydrogen atom, or a group of the formula  $-OR^a$ ,  $-SR^b$  or  $-NR_2^c$  in which each of  $R^a$ ,  $R^b$  and  $R^c$  represents an alkyl group, a cycloalkyl group, an aryl group, an aralkyl  
20   group or an organic silyl group, Me represents zirconium, titanium or hafnium, k is 1, 2, 3 or 4,  $\ell$ , m and n are each 0, 1, 2 or 3, and  $k+\ell+m+n=4$ .

- Examples of the cycloalkadienyl group represented by  $R^1$  are a cyclopentadienyl group, a methyl-  
25   cyclopentadienyl group, an ethylcyclopentadienyl group, a dimethylcyclopentadienyl group, an indenyl group and a tetrahydroindenyl group. Examples of the cycloalkadienyl group represented by  $R^2$ ,  $R^3$  and  $R^4$  may be the same as above.

- 30           The aryl group represented by  $R^2$ ,  $R^3$  and  $R^4$  is preferably a phenyl or tolyl group, for example.

          Likewise, preferred examples of the aralkyl group are benzyl and neophile groups.



- 8 -

Examples of preferred alkyl groups are methyl, ethyl, propyl, isopropyl, butyl, hexyl, octyl, 2-ethylhexyl, decyl and oleyl groups.

Preferably, the cycloalkyl group may be, for example, a cyclopentyl, cyclohexyl, cyclooctyl, or norbornyl group.

The halogen atom may be, for example, fluorine, chlorine or bromine.

Specific examples of the groups  $-OR^a$ ,  $-SR^b$  and  $-NR_2^c$  where  $R^a$ ,  $R^b$  and  $R^c$  are alkyl, cycloalkyl, aryl and aralkyl will be clear from the above specific examples of these groups.

Examples of the organic silyl group for  $R^a$ ,  $R^b$  and  $R^c$  are trimethylsilyl, triethylsilyl, phenyldimethylsilyl, diphenylmethylsilyl and triphenylsilyl groups.

Examples of zirconium compounds corresponding to formula (I) in which Me is zirconium are listed below:

bis(cyclopentadienyl)zirconium monochloride  
monohydride,  
bis(cyclopentadienyl)zirconium monobromide  
monohydride,  
bis(cyclopentadienyl)methylzirconium hydride,  
bis(cyclopentadienyl)ethylzirconium hydride,  
bis(cyclopentadienyl)cyclohexylzirconium  
hydride,  
bis(cyclopentadienyl)phenylzirconium hydride,  
bis(cyclopentadienyl)benzylzirconium hydride,  
bis(cyclopentadienyl)neopentylzirconium  
hydride,  
bis(methylcyclopentadienyl)zirconium monochloride monohydride,  
bis(indenyl)zirconium monochloride monohydride,  
bis(cyclopentadienyl)zirconium dichloride,  
bis(cyclopentadienyl)zirconium dibromide,  
bis(cyclopentadienyl)methylzirconium monochloride,

- bis(cyclopentadienyl)ethylzirconium mono-  
chloride,  
bis(cyclopentadienyl)cyclohexylzirconium mono-  
chloride,  
5 bis(cyclopentadienyl)phenylzirconium mono-  
chloride,  
bis(cyclopentadienyl)benzylzirconium mono-  
chloride,  
bis(methylcyclopentadienyl)zirconium di-  
10 chloride,  
bis(indenyl)zirconium dichloride,  
bis(indenyl)zirconium dibromide,  
bis(cyclopentadienyl)diphenylzirconium,  
bis(cyclopentadienyl)benzylzirconium,  
15 bis(cyclopentadienyl)methoxyzirconium chloride,  
bis(cyclopentadienyl)ethoxyzirconium chloride,  
bis(cyclopentadienyl)butoxyzirconium chloride,  
bis(cyclopentadienyl)2-ethylhexoxyzirconium  
chloride,  
20 bis(cyclopentadienyl)methylzirconium ethoxide,  
bis(cyclopentadienyl)methylzirconium butoxide,  
bis(cyclopentadienyl)ethylzirconium ethoxide,  
bis(cyclopentadienyl)phenylzirconium ethoxide,  
bis(cyclopentadienyl)benzylzirconium ethoxide,  
25 bis(methylcyclopentadienyl)ethoxyzirconium  
chloride,  
bis(indenyl)ethoxyzirconium chloride,  
bis(cyclopentadienyl)ethoxyzirconium,  
bis(cyclopentadienyl)butoxyzirconium,  
30 bis(cyclopentadienyl)2-ethylhexoxyzirconium,  
bis(cyclopentadienyl)phenoxyzirconium chloride,  
bis(cyclopentadienyl)cyclohexoxyzirconium  
chloride,  
bis(cyclopentadienyl)phenylmethoxyzirconium  
35 chloride,  
bis(cyclopentadienyl)methylzirconium phenyl-  
methoxide,

- 10 -

- bis(cyclopentadienyl)trimethylsiloxyzirconium  
chloride,  
bis(cyclopentadienyl)triphenylsiloxyzirconium  
chloride,  
5 bis(cyclopentadienyl)thiophenylzirconium  
chloride,  
bis(cyclopentadienyl)thioethylzirconium  
chloride,  
bis(cyclopentadienyl)bis(dimethylamide)-  
10 zirconium,  
bis(cyclopentadienyl)diethylamidezirconium  
chloride,  
ethylenebis(indenyl)ethoxyzirconium chloride,  
ethylenebis(4,5,6,7-tetrahydro-1-indenyl)-  
15 ethoxyzirconium chloride,  
ethylenebis(indenyl)dimethylzirconium,  
ethylenebis(indenyl)diethylzirconium,  
ethylenebis(indenyl)dibenzylzirconium,  
ethylenebis(indenyl)methylzirconium mono-  
20 bromide,  
ethylenebis(indenyl)ethylzirconium mono-  
chloride,  
ethylenebis(indenyl)benzylzirconium mono-  
chloride,  
25 ethylenebis(indenyl)methylzirconium mono-  
chloride,  
ethylenebis(indenyl)zirconium dichloride,  
ethylenebis(indenyl)zirconium dibromide,  
ethylenebis(4,5,6,7-tetrahydro-1-indenyl)-  
30 dimethylzirconium,  
ethylenebis(4,5,6,7-tetrahydro-1-indenyl)-  
methylzirconium monochloride,  
ethylenebis(4,5,6,7-tetrahydro-1-indenyl)-  
zirconium dichloride,  
35 ethylenebis(4,5,6,7-tetrahydro-1-indenyl)-  
zirconium dibromide,

- 11 -

- ethylenebis(4-methyl-1-indenyl)zirconium  
dichloride,
- ethylenebis(5-methyl-1-indenyl)zirconium  
dichloride,
- 5       ethylenebis(6-methyl-1-indenyl)zirconium  
dichloride,
- ethylenebis(7-methyl-1-indenyl)zirconium  
dichloride,
- ethylenebis(5-methoxy-1-indenyl)zirconium  
10 dichloride,
- ethylenebis(2,3-dimethyl-1-indenyl)zirconium  
dichloride,
- ethylenebis(4,7-dimethyl-1-indenyl)zirconium  
dichloride,
- 15       ethylenebis(4,7-dimethoxy-1-indenyl)zirconium  
dichloride,
- ethylenebis(indenyl)zirconium dimethoxide,  
ethylenebis(indenyl)zirconium diethoxide,  
ethylenebis((indenyl)methoxy)zirconium chloride,  
20       ethylenebis(indenyl)ethoxyzirconium chloride,  
ethylenebis(indenyl)methylzirconium ethoxide,  
ethylenebis(4,5,6,7-tetrahydro-1-indenyl)-  
zirconium dimethoxide,  
ethylenebis(4,5,6,7-tetrahydro-1-indenyl)-  
25       zirconium diethoxide,  
ethylenebis(4,5,6,7-tetrahydro-1-indenyl)-  
methoxyzirconium chloride,  
ethylenebis(4,5,6,7-tetrahydro-1-indenyl)-  
ethoxyzirconium chloride, and  
30       ethylenebis(4,5,6,7-tetrahydro-1-indenyl)-  
methylzirconium ethoxide.

Examples of titanium compounds corresponding to  
formula (I) in which Me is titanium are listed below:

- bis(cyclopentadienyl)titanium monochloride  
35 monohydride,  
bis(cyclopentadienyl)methyltitanium hydride,

- 12 -

bis(cyclopentadienyl)phenyltitanium chloride,  
bis(cyclopentadienyl)benzyltitanium chloride,  
bis(cyclopentadienyl)titanium chloride,  
bis(cyclopentadienyl)dibenzyltitanium,  
5 bis(cyclopentadienyl)ethoxytitanium chloride,  
bis(cyclopentadienyl)butoxytitanium chloride,  
bis(cyclopentadienyl)methyltitanium ethoxide,  
bis(cyclopentadienyl)phenoxytitanium chloride,  
bis(cyclopentadienyl)trimethylsiloxytitanium  
10 chloride,  
bis(cyclopentadienyl)thiophenyltitanium chloride,  
bis(cyclopentadienyl)bis(dimethylamide)titanium,  
bis(cyclopentadienyl)ethoxytitanium,  
ethylenebis(indenyl)titanium dichloride, and  
15 ethylenebis(4,5,6,7-tetrahydro-1-indenyl)-  
titanium dichloride.

Examples of hafnium compounds corresponding to  
formula (I) in which Me is hafnium are listed below:

bis(cyclopentadienyl)hafnium monochloride  
20 monohydride,  
bis(cyclopentadienyl)ethylhafnium hydride,  
bis(cyclopentadienyl)phenylhafnium chloride,  
bis(cyclopentadienyl)hafnium dichloride,  
bis(cyclopentadienyl)hafnium dibenzil  
25 bis(cyclopentadienyl)ethoxyhafnium chloride,  
bis(cyclopentadienyl)butoxyhafnium chloride,  
bis(cyclopentadienyl)methylhafnium ethoxide,  
bis(cyclopentadienyl)phenoxyhafnium chloride,  
bis(cyclopentadienyl)thiophenylhafnium  
30 chloride,  
bis(cyclopentadienyl)bis(diethylamide)hafnium,  
ethylenebis(indenyl)hafnium dichloride, and  
ethylenebis(4,5,6,7-tetrahydro-1-indenyl)-  
hafnium dichloride.

35 In the catalyst component (A), the IVB tran-  
sition metal compound may be treated with an organic

- 13 -

metal compound prior to supporting. The organic metal compound may be, for example, an organoaluminum compound, an organoboron compound, an organomagnesium compound, an organozinc compound or an organolithium compound. The  
5 organoaluminum compound is preferred.

Examples of the organoaluminum compound include trialkylaluminums such as trimethylaluminum, triethylaluminum and tributylaluminum; alkenylaluminums such as isoprenylaluminum; dialkyl aluminum alkoxides such as  
10 dimethyl aluminum methoxide, diethyl aluminum ethoxide and dibutyl aluminum butoxide; alkyl aluminum sesquialkoxides such as methyl aluminum sesquimethoxide and ethyl aluminum sesquiethoxide; partially alkoxyated alkylaluminums having an average composition of the  
15 formula  $R_{2.5}^1Al(OR^2)_{0.5}$ ; dialkyl aluminum halides such as dimethyl aluminum chloride, diethyl aluminum chloride and dimethyl aluminum bromide; alkyl aluminum sesquihalides such as methyl aluminum sesquichloride and ethyl aluminum sesquichloride; partially halogenated  
20 alkylaluminums, for example alkyl aluminum dihalides such as methyl aluminum dichloride and ethyl aluminum dichloride.

The trialkylaluminums and dialkyl aluminum chlorides are preferred, and above all trimethylaluminum,  
25 triethylaluminum and dimethyl aluminum chloride are preferred.

Triethylboron is a preferred example of the organoboron compound.

Examples of the organomagnesium compound are  
30 ethylbutylmagnesium, di-n-hexylmagnesium, ethyl magnesium bromide, phenyl magnesium bromide and benzyl magnesium chloride.

Diethylzinc is a preferred example of the organozinc compound.

35 Methylolithium, butyllithium and phenyllithium are examples of the organolithium compound.

- 14 -

An organoaluminum compound is preferred as the organic metal compound (C).

In the catalyst of this invention, the solid catalyst component (A) is composed of the compound of the transition metal of Group IVB of the periodic table supported on a carrier.

The carrier may be organic or inorganic, and is advantageously a granular or particulate solid having a particle diameter of, for example, 10 to 300 micrometers, preferably 20 to 200 micrometers. A porous oxide is preferred as the inorganic carrier. Specific examples include  $\text{SiO}_2$ ,  $\text{Al}_2\text{O}_3$ ,  $\text{MgO}$ ,  $\text{ZrO}_2$ ,  $\text{TiO}_2$ ,  $\text{B}_2\text{O}_3$ ,  $\text{CaO}$ ,  $\text{ZnO}$ ,  $\text{BaO}$  and  $\text{ThO}_2$  and mixtures of these, such as  $\text{SiO}_2\text{-MgO}$ ,  $\text{SiO}_2\text{-Al}_2\text{O}_3$ ,  $\text{SiO}_2\text{-TiO}_2$ ,  $\text{SiO}_2\text{-V}_2\text{O}_5$ ,  $\text{SiO}_2\text{-Cr}_2\text{O}_3$  and  $\text{SiO}_2\text{-TiO}_2\text{-MgO}$ . A catalyst containing at least one component selected from the group of  $\text{SiO}_2$  and  $\text{Al}_2\text{O}_3$  as a main component is preferred.

The inorganic oxide may contain a small amount of a carbonate, nitrate, sulfate or an oxide component such as  $\text{Na}_2\text{CO}_3$ ,  $\text{K}_2\text{CO}_3$ ,  $\text{CaCO}_3$ ,  $\text{MgCO}_3$ ,  $\text{Na}_2\text{SO}_4$ ,  $\text{Al}_2(\text{SO}_4)_3$ ,  $\text{BaSO}_4$ ,  $\text{KNO}_3$ ,  $\text{Mg}(\text{NO}_3)_2$ ,  $\text{Al}(\text{NO}_3)_3$ ,  $\text{Na}_2\text{O}$ ,  $\text{K}_2\text{O}$  and  $\text{Li}_2\text{O}$ .

The porous inorganic carrier preferably used in this invention has a specific surface area of 50 to 1000  $\text{m}^2/\text{g}$ , preferably 100 to 700  $\text{m}^2/\text{g}$  and a pore volume of 0.3 to 2.5  $\text{cm}^3/\text{g}$ , although its characteristics vary depending upon its type and the method of production. The carrier is used after it is calcined usually at 150 to 1000  $^\circ\text{C}$ , preferably 200 to 800  $^\circ\text{C}$ .

Granular or particulate solids of organic compounds having a particle diameter of 10 to 300 micrometers may also be used in the present invention. Examples of the organic compounds are (co)polymers containing alpha-olefins having 2 to 14 carbon atoms such as ethylene, propylene, 1-butene, 4-methyl-1-pentene and 1-decene as a main component, and polymers or copolymers containing vinylcyclohexane or styrene as a main component.

- 15 -

The mixing weight ratio of the Group IVB transition metal compound to the carrier (transition metal/carrier) in the supporting reaction in this invention is 0.5 to 15 %, preferably 0.8 to 10 % by weight,  
5 more preferably 1 to 7 % by weight.

The supporting may be carried out, for example, by mixing the carrier and the transition metal compound in the presence of an inert solvent, and removing the solvent by using an evaporator, for example, at room  
10 temperature or at an elevated temperature under atmospheric pressure or elevated pressure.

It can also be achieved by the following methods, for example.



(1) A method which comprises treating the  
15 carrier with an organoaluminum compound such as trimethylaluminum, dimethyl aluminum chloride and aluminoxane or a halogen-containing silicon compound such as trichlorosilane, and mixing the treated carrier with the Group IVB transition metal compound.  
20

(2) A method which comprises treating the Group IVB transition metal compound with an organoaluminum compound such as trimethylaluminum or dimethyl aluminum chloride and then  
25 mixing the treated compound with the carrier in the presence of an inert solvent.

(3) A method which comprises mixing the carrier, the Group IVB transition metal compound and the aluminoxane as catalyst component  
30 (B), or removing the solvent from the mixture using an evaporator, for example, under atmospheric pressure or reduced pressure.

The catalyst component (B) is an aluminoxane. The aluminoxane used as the catalyst component (B) may  
35 be, for example, an organoaluminum compound represented by the following formula (II)



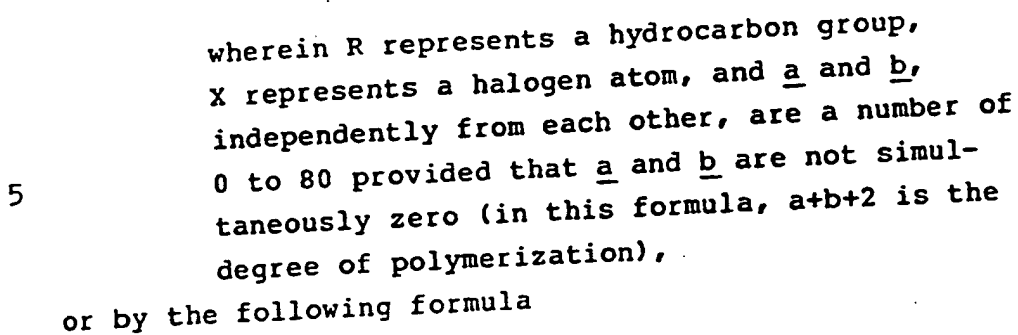

wherein R, X, a, and b are as defined with regard to formula (II) above (in this formula, a+b is the degree of polymerization).


In the above formulae (II) and (III), R represents a hydrocarbon group such as an alkyl, cycloalkyl, aryl or aralkyl group. The alkyl group is preferably a lower alkyl group such as a methyl, ethyl, propyl or butyl group. The cycloalkyl group is preferably a cyclopentyl or cyclohexyl group. The aryl group is preferably a phenyl or tolyl group. Benzyl and neophyl groups are preferred examples of the aralkyl group. Among them, the alkyl groups are especially preferred.

X is a halogen atom such as fluorine, chlorine, bromine or iodine. Chlorine is especially preferred.

a and b, independently from each other, represent a number of 0 to 80, provided that a and b are not simultaneously zero.

When  $b$  is 0, formula (II) can be written as

- 17 -

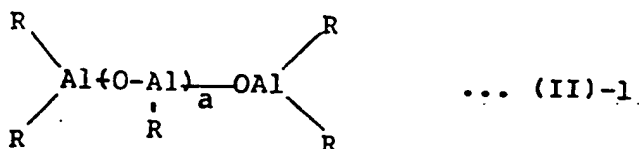

wherein R and a are as defined above.

The formula (III) above may be written as the following formula (III)-1

5



wherein R and a are as defined above.

In formula (II)-1, a is preferably 2 to 50, more preferably 4 to 30. In formula (III)-1, a is preferably 4 to 52, more preferably 6 to 32.

10 a is preferably 0 to 40, more preferably 3 to 30, and b is preferably 1 to 40, more preferably 3 to 30.

The a+b value is preferably 4 to 50, more preferably 8 to 30.

In formulae (II) and (III), the two units  
 15  $\text{-O-Al-}$  and  $\text{-O-Al-}$  may be bonded in blocks or at random.  
        $\text{R}$                    $\text{R}$

When a is 0 in formulae (II) and (III), it is desirable to use an organoaluminum compound of the following formula (V)



20 wherein  $\text{R}^7$  represents an alkyl group having 1 to 10 carbon atoms or a cycloalkyl group having 3 to 12 carbon atoms, Z represents a halogen atom, and f is a number of 1 to 3,  
 together with the halogenated aluminoxane. Examples of  
 25 the organoaluminum compound are trimethylaluminum, triethylaluminum, tributylaluminum, trihexylaluminum,

- 18 -

diethylaluminum chloride and ethyl aluminum sesquichloride.

At this time, it is desirable to use 0.1 to 10 moles, preferably 0.3 to 3.0 moles, especially preferably 5 0.5 to 2.0 moles, of the organoaluminum compound per mole of the aluminum atom of the halogenated aluminoxane.

The following methods may be cited as examples of producing the aluminoxane or the halogenated aluminoxane.

10 (1) A method which comprises reacting a compound containing water of adsorption or a salt containing water of crystallization, such as magnesium chloride hydrate, nickel sulfate hydrate or cerous chloride hydrate, with a trialkylaluminum or a dialkyl aluminum 15 monohalide while the former is being suspended in a medium such as benzene, toluene, ethyl ether or tetrahydrofuran.

(2) A method which comprises the action of water directly on a trialkylaluminum and/or a dialkyl 20 aluminum monohalide in a medium such as benzene, toluene, ethyl ether or tetrahydrofuran.

Of these, the method (1) is preferably employed. The aluminoxane may contain a small amount of an organometallic component.

25 The catalyst of this invention may be prepared by contacting the prepared carrier-supported solid catalyst component (A) and aluminoxane catalyst component (B) in an inert medium, or by supporting the Group IVB transition metal compound and the aluminoxane simultaneously 30 on a carrier, prior to pre-polymerization. Preferably, prior to pre-polymerization, the catalyst components (A) and (B) are mixed in an inert hydrocarbon medium. When the inert hydrocarbon medium dissolves the catalyst component (B), the resulting mixture is preferably 35 subjected to an evaporator at room temperature or at an elevated temperature under atmospheric or reduced

- 19 -

pressure to remove the solvent. It is alternatively preferred to deposit the catalyst component (B) by, for example, adding a solvent in which the catalyst component (B) is insoluble, thereby to form a solid catalyst at least comprising (A) and (B).

The catalyst of this invention contains the transition metal compound in an amount of usually 0.003 to 3 mg-atom, preferably 0.005 to 2 mg-atom, especially preferably 0.01 to 1 mg-atom, as the transition metal atom per gram of the carrier. The proportion of the aluminoxane catalyst component, whether prior to the pre-polymerization of an olefin, the catalyst is a solid catalyst formed from the components (A) and (B) in an inert hydrocarbon medium or a solid catalyst formed by supporting the transition metal component and the aluminoxane catalyst component, is such that the atomic ratio of aluminum atom to the transition metal atom of the transition metal compound (Al/Me) is from 1 to 1000, preferably from 10 to 700, especially preferably from 15 to 500.

The catalyst of this invention may contain an electron donor in addition to the carrier component, transition metal compound and the aluminoxane. Examples of the electron donor include carboxylic acids, esters, ethers, ketones, aldehydes, alcohols, phenols, acid amides, oxygen-containing compounds such as compounds containing a metal-O-C bond (the metal is, for example, aluminum or silicon), nitriles, amines, and phosphines. The proportion of the electron donor is usually 0 to 1 mole, preferably 0.1 to 0.6 mole, per gram of the transition metal atom (Me).

The solid catalyst component in this invention has an average particle diameter of usually 10 to 300 micrometers, preferably 20 to 200 micrometers, more preferably 25 to 100 micrometers and a specific surface area of usually 20 to 1000 m<sup>2</sup>/g, preferably 50 to 500 m<sup>2</sup>/g,

- 20 -

specially preferably 100 to 300 m<sup>2</sup>/g.

The catalyst of this invention is formed by pre-polymerizing an olefin in the presence of the solid catalyst component formed from the catalyst components (A) and (B) prior to the main polymerization of an olefin. The pre-polymerization is carried out by polymerizing 0.05 to 30 g, preferably 0.1 to 20 g, more preferably 0.2 to 10 g, of the olefin per gram of the solid catalyst component formed from the catalyst components (A) and (B). Examples of the olefin are ethylene, and alpha-olefins having 3 to 20 carbon atoms such as propylene, 1-butene, 4-methyl-1-pentene, 1-hexene, 1-octene, 1-decene, 1-dodecene and 1-tetradecene. Ethylene is especially preferred.

The pre-polymerization is carried out (1) in the absence of a solvent, or (2) in an inert hydrocarbon medium. The mole ratio of the aluminum atom of the catalyst component (B) to the transition metal atom of the catalyst component (A) (Al/transition metal atom) in the pre-polymerization treatment is from 1 to 1000, preferably from 10 to 700, more preferably from 15 to 500. The pre-polymerization temperature is from -20 °C to 70 °C, preferably -10 °C to 60 °C, more preferably 0 °C to 50 °C.

The pre-polymerization treatment may be carried out batchwise or continuously under reduced, atmospheric or elevated pressure. A molecular weight controlling agent such as hydrogen may be caused to be present in the pre-polymerization. Its amount, however, is preferably limited to those values in which a prepolymer having an intrinsic viscosity  $[\eta]$ , measured in decalin at 135 °C, of at least 0.2 dl/g, preferably 0.5 to 20 dl/g, can be produced.

By using the catalyst of this invention described above, alpha-olefins can be advantageously polymerized or copolymerized.

- 21 -

Investigations of the present inventors have shown that when a porous inorganic oxide treated with a compound selected from the group consisting of organometallic compounds, halogen-containing silicon compounds and aluminoxanes is used as a carrier for the solid catalyst component (A) in the catalyst component (A) and the aluminoxane (B) before pre-polymerization treatment, the resulting catalyst shows excellent activity equivalent to the catalyst of this invention without subjecting it to pre-polymerization treatment.

Accordingly, the objects and advantages of the present invention are achieved secondly by a catalyst for polymerization of alpha-olefins, said catalyst comprising (A') a solid catalyst component composed of a compound of a transition metal of Group I of the periodic table supported on a porous inorganic oxide carrier treated with a compound selected from the group consisting of organometallic compounds, halogen-containing silicon compounds and aluminoxanes, and (B) an aluminoxane.

In the catalyst of this invention for polymerization of alpha-olefins, the porous inorganic oxide carrier is treated with a compound selected from the group consisting of organometallic compounds, halogen-containing silicon compounds and aluminoxanes.

The porous inorganic oxide carrier may be any of those which are exemplified hereinabove.

The organometallic compounds as the treating agent may be the same as those exemplified hereinabove.

In the above treatment, the mixing ratio of the organometallic compound to the carrier, as the ratio of the millimoles of the organometallic compound to the grams of the carrier, is from 0.5 to 50, preferably from 1 to 30, preferably from 1.5 to 20.

The treatment of the porous inorganic oxide carrier with the organometallic compound in the catalyst

- 22 -

component (A') may be carried out by dispersing the carrier in an inert solvent, adding at least one organo-metallic compound mentioned above, and maintaining the mixture at a temperature of 0 to 120 °C, preferably 10 to 100 °C, more preferably 20 to 90 °C, for a period of 10 minutes to 10 hours, preferably 20 minutes to 5 hours, more preferably 30 minutes to 3 hours, under atmospheric, reduced or elevated pressure.

Examples of the inert solvent are aromatic hydrocarbons such as benzene, toluene and xylene, aliphatic hydrocarbon such as pentane, hexane and isooctane, and alicyclic hydrocarbons such as cyclohexane.

The Group IVB transition metal compound is supported in a proportion of  $3 \times 10^{-3}$  to 3 mg-atom, preferably  $5 \times 10^{-3}$  to 2 mg-atom, more preferably  $1 \times 10^{-2}$  to 1 mg-atom, as the transition metal atom, per gram of the porous inorganic oxide carrier treated with the organometallic compound.

The supporting of the transition metal compound may be carried out by, for example, adding the porous inorganic oxide carrier treated with the organometallic compound and the transition metal compound in an inert hydrocarbon medium, and working up the mixture in the following manner.

The treating temperature is usually 0 to 100 °C, preferably 20 to 90 °C, and the treating time is usually 5 minutes to 5 hours, preferably 10 minutes to 2 hours. After the supporting, the inert hydrocarbon medium is removed by filtration or evaporated under atmospheric or reduced pressure to give a solid catalyst component.

Preferably, the halogen-containing silicon compound as the treating agent is, for example, a compound represented by the following formula (IV)



5 wherein Y represents a chlorine or bromine atom,  $\text{R}^5$  and  $\text{R}^6$ , independently from each other, represent an alkyl group having 1 to 12 carbon atoms, an aryl group, or a cycloalkyl group having 3 to 12 carbon atoms, d is a number of 1 to 4, and e is a number of 0 to 4, provided that the total of d and e is a number of 1 to 4.

10 Examples of this compound include silicon tetrachloride, silicon tetrabromide, silicon trichloride, methylsilicon trichloride, ethylsilicon trichloride, propylsilicon trichloride, phenylsilicon trichloride, cyclohexylsilicon trichloride, silicon tribromide,  
 15 ethylsilicon tribromide, dimethylsilicon dichloride, methylsilicon dichloride, phenylsilicon dichloride, methoxysilicon trichloride, ethoxysilicon trichloride, propoxysilicone trichloride, phenoxysilicon trichloride, ethoxysilicon tribromide, methoxysilicon dichloride,  
 20 methoxysilicon dichloride, and silanol trichloride. They may be used singly or in combination. Among them, silicon tetrachloride, silicon trichloride and methylsilicon trichloride are preferred.

The mixing ratio of the halogen-containing  
 25 silicon compound and the porous inorganic oxide the above treatment is such that the proportion of the halogen-containing silicon compound is 0.001 to 10 moles, preferably 0.01 to 5 moles, more preferably 0.05 to 1 mole, per gram of the carrier compound. Preferably, after the  
 30 treatment, the liquid portion containing the excess of the halogen-containing silane compound, for example is removed from the reaction mixture by filtration, decantation or the like.

In the preparation of the catalyst component



- 24 -

(A'), the treatment of the porous inorganic oxide carrier with the halogen-containing silicon compound is carried out at a temperature of -50 to 200 °C, preferably 0 to 100 °C, more preferably 20 to 70 °C, for a period of 10 minutes to 10 hours, preferably 20 minutes to 5 hours, under atmospheric, reduced or elevated pressure.

In the above treatment, an inert solvent may be used. Examples of the inert solvent are aromatic hydrocarbons such as benzene, toluene and xylene, aliphatic hydrocarbons such as pentane, hexane, isooctane, decane and dodecane, alicyclic hydrocarbons such as cyclohexane, and halogenated hydrocarbons such as chlorobenzene and ethylene dichloride.

In the preparation of the catalyst component (A'), if the Group IVB transition metal compound to be supported on the porous inorganic oxide carrier treated with the halogen-containing silane compound in the catalyst component (A') is liquid, it is not necessary to use an inert solvent. When the transition metal compound is a normally solid substance, it is generally preferred to use an inert solvent capable of dissolving the transition metal compound.

The inert solvent that can be used at this time may be the same as those exemplified hereinabove with regard to the treatment of the porous inorganic oxide carrier. Aromatic hydrocarbons such as benzene and toluene and halogenated hydrocarbons such as chlorobenzene are especially preferred.

The amount of the transition metal compound used in the above supporting reaction is preferably 0.001 to 500 millimoles, preferably 0.01 to 100 millimoles, especially preferably 0.1 to 50 millimoles, per gram of the porous inorganic oxide carrier treated with the halogen-containing silane compound.

The amount of the inert solvent used in the above supporting reaction is 0.5 to 1000 ml, preferably 1

- 25 -

to 100 ml, especially preferably 2 to 50 ml, per gram of the porous inorganic oxide carrier treated with the halogen-containing silane compound.

The above supporting reaction may be carried out by contacting and mixing the transition metal compound with the porous inorganic oxide carrier treated with the halogen-containing silane compound at a temperature of 0 to 200 °C, preferably 0 to 100 °C, especially 20 to 80 °C, for 1 minute to 10 hours, 5 minutes to 5 hours, or 10 minutes to 3 hours.

After the supporting reaction is carried out by the above method, the liquid portion of the reaction mixture is removed by, for example, filtration or decantation, and preferably the residue is washed several times with an inert solvent.

The solid catalyst component (A') prepared by the above method contains the transition metal compound in an amount of usually 0.005 to 5 millimoles, preferably 0.01 to 1 millimole, especially preferably 0.03 to 0.3 millimole, per gram of the component (A').

Examples of the aluminoxanes as the treating agent may be the same as those exemplified above as the catalyst component (B).

In the treatment of the porous inorganic oxide carrier with the aluminoxane, the mixing ratio of both is such that the proportion of the aluminoxane is 0.001 to 100 millimoles, preferably 0.01 to 10 millimoles, preferably 0.05 to 5 millimoles, per gram of the carrier compound. Preferably, the liquid portion containing the excess of the aluminoxane after the above treatment is removed from the reaction mixture by such a method as filtration or decantation.

The treatment of the porous inorganic oxide carrier with the aluminoxane in the preparation of the catalyst component (A') may be carried out at a temperature of -50 to 200 °C, preferably 0 to 100 °C, more

- 26 -

preferably 20 to 70 °C under atmospheric, reduced or elevated pressure for a period of 10 minutes to 10 hours, preferably 20 minutes to 5 hours.

The above treatment is preferably carried out in an inert solvent. Examples of the inert solvent may include aromatic hydrocarbons such as benzene, toluene and xylene, aliphatic hydrocarbons such as pentane, hexane, isooctane, decane and dodecane, alicyclic hydrocarbons such as cyclohexane and halogenated hydrocarbons such as chlorobenzene and ethylene dichloride. Of these, the aromatic hydrocarbons are preferred.

When the Group IVB transition metal compound is liquid in depositing it on the porous inorganic oxide carrier treated with the aluminosilicate, an inert solvent may or may not be used. When the transition metal compound is a normally solid substance, it is generally preferred to use an inert solvent capable of dissolving the transition metal compound.

The inert solvent that can be used at this time may be the same as those used in treating the porous inorganic oxide carrier with the aluminosilicate. Aromatic hydrocarbons such as benzene and toluene and halogenated hydrocarbons such as chlorobenzene are especially preferred.

The amount of the transition metal compound used in the above supporting reaction is 0.001 to 10 millimoles, preferably 0.005 to 5 millimoles, especially preferably 0.01 to 1 millimole, per gram of the porous inorganic oxide carrier treated with the aluminosilicate.

The amount of the inert solvent, the reaction temperature, the reaction time and the after-treatment used in the above supporting reaction may be the same as those described above with regard to the porous inorganic oxide carrier treated with the halogen-containing silicon compound.

- 27 -

The solid catalyst component (A') prepared by the above method contains the transition metal compound in an amount of usually 0.005 to 5 millimoles, preferably 0.01 to 1 millimole, especially preferably 0.03 to 0.3 millimole, per gram of the component (A').

The above catalyst of this invention comprises the solid catalyst component (A') prepared as above and the aluminoxane (B).

The catalysts of the invention described above can be used advantageously in the homopolymerization or copolymerization of alpha-olefins, and are particularly effective for the production of an ethylene polymer and a copolymer of ethylene and an alpha-olefin. Examples of the olefins that can be used in this invention are ethylene and alpha-olefins having 3 to 20 carbon atoms such as 1-butene, 1-hexene, 4-methyl-1-pentene, 1-octene, 1-decene, 1-dodecene, 1-tetradecene, 1-hexadecene, 1-octadecene and 1-eicosene.

In the process of this invention, olefin polymerization is usually carried out in the vapor phase or the liquid phase, for example in slurry. In the slurry polymerization, an inert hydrocarbon may be used as a solvent, or an olefin itself may be used as the solvent.

Specific examples of the hydrocarbon medium include aliphatic hydrocarbons such as butane, isobutane, pentane, hexane, octane, decane, dodecane, hexadecane and octadecane; alicyclic hydrocarbons such as cyclopentane, methylcyclopentane, cyclohexane and cyclooctane; aromatic hydrocarbons such as benzene, toluene and xylene; and petroleum fractions such as gasoline, kerosene and light oil. Of these, the aliphatic hydrocarbons, alicyclic hydrocarbons and petroleum fractions are preferred.

In carrying out slurry polymerization in the process of this invention, the polymerization temperature is usually -50 to 120 °C, preferably 0 to 100 °C.

In carrying out the process of this invention

- 28 -

by a slurry or vapor-phase polymerization technique, the proportion of the transition metal compound is usually  $10^{-8}$  to  $10^{-2}$  gram-atom/liter, preferably  $10^{-7}$  to  $10^{-3}$  gram-atom/liter, as the concentration of the transition metal atom in the polymerization reaction system.

In the main polymerization reaction, the aluminoxane may, or may not, be used additionally. But to obtain a polymer having excellent powder characteristics, it is preferred not to use the aluminoxane additionally.

The polymerization pressure is usually atmospheric pressure to an elevated pressure of  $100 \text{ kg/cm}^2$ , preferably 2 to  $50 \text{ kg/cm}^2$ . The polymerization may be carried out batchwise, semi-continuously or continuously.

The polymerization may also be carried out in two or more steps in which the reaction conditions are different.

When a slurry polymerization technique or a vapor-phase polymerization technique is employed in the polymerization of olefins, particularly the polymerization of ethylene or the polymerization of ethylene with an alpha-olefin, no polymer adhesion to the reactor occurs, and a polymer having excellent powder characteristics and a narrow molecular distribution can be obtained. In particular, when the catalyst of this invention is applied to the copolymerization of two or more olefins, an olefin copolymer having a narrow molecular weight distribution and a narrow composition distribution can be obtained.

#### EXAMPLES

The following examples specifically illustrate the process of this invention.

In Examples and Comparative Examples, MFR was measured at a temperature of  $190^\circ \text{C}$  under a load of 2.16 kg. The  $\bar{M}_w/\bar{M}_n$  was measured by the following

- 29 -

procedure in accordance with "Gel Permeation Chromatography", written by Takeuchi, and published by Maruzen Co., Ltd.

(1) Using standard polystyrene having a known molecular weight (monodisperse polystyrene produced by Toyo Soda Co., Ltd.), molecular weight  $M$  and its GPC (gel permeation chromatography) count are measured, and a calibration curve of the molecular weight  $M$  and  $EV$  (elution volume) is prepared. The concentration at this time is set at 0.02 % by weight.

(2) A GPC chromatograph of the sample is taken by GPC measurement. On the basis of (1) above, the number average molecular weight  $\bar{M}_n$  and the weight average molecular weight  $\bar{M}_w$  of the sample are calculated for polystyrene, and the  $\bar{M}_w/\bar{M}_n$  is determined. The sample preparation conditions and the GPC measurement conditions are as follows:-

#### Sample Preparation

(a) The sample and o-dichlorobenzene as a solvent are taken into an Erlenmeyer flask so that the concentration of the sample is 0.1 % by weight.

(b) The Erlenmeyer flask is heated at 140 °C and the mixture is stirred for about 30 minutes to dissolve the sample.

(c) A filtrate of the solution is subjected to GPC.

#### GPC Measurement Conditions

GPC was performed under the following conditions.

- (a) Device: 150C-ALC/GPC made by Waters Co.
- (b) Column: GMH type made by Toyo Soda Co., Ltd.
- (c) Amount of the sample: 400 microliters
- (d) Temperature: 140 °C.
- (e) Flow rate: 1 ml/min.

The amount of an n-decane-soluble portion of the copolymer (as the amount of the soluble portion is

- 30 -

smaller, the composition distribution of the copolymer is narrower) is measured by adding about 3 g of the copolymer to 450 ml of n-decane, dissolving it at 145 °C, gradually cooling the solution to 23 °C, removing the  
5 n-decane-insoluble portion by filtration, and recovering the n-decane-soluble portion from the filtrate.

#### Example 1

##### Preparation of aluminoxane

A 400 ml fully nitrogen-purged flask was  
10 charged with 37 g of  $\text{Al}_2(\text{SO}_4)_3 \cdot 14\text{H}_2\text{O}$  and 125 ml of toluene. The flask was cooled to 0 °C, and 500 millimoles of trimethylaluminum diluted with 125 ml of toluene. The mixture was then heated to 40 °C, and reacted at this temperature for 10 hours. After the reaction, the  
15 reaction mixture was subjected to solid-liquid separation by filtration. The toluene was removed from the filtrate to give 13 g of aluminoxane as a white solid. The molecular weight of the product, determined by freezing point depression in benzene, was 930. It had an average degree  
20 of polymerization of 16.

##### Preparation of a zirconium catalyst

2.3 g of calcined silica obtained by calcining silica (average particle diameter 70  $\mu\text{m}$ , specific surface area 260  $\text{m}^2/\text{g}$ , pore volume 1.65  $\text{cm}^3/\text{g}$ ) at 300 °C for  
25 4 hours, 15 ml of a toluene solution (aluminum 1 mole/liter) of dimethyl aluminum monochloride and 50 ml of toluene were introduced into a 200 ml flask purged fully with nitrogen, and heated at 80 °C for 2 hours. The reaction mixture was subjected to solid-liquid separation  
30 by filtration. The solid portion was transferred into 50 ml of toluene, and 6.4 ml of a toluene solution (Zr 0.01 mole/liter) of biscyclopentadienyl zirconium chloride was added. The mixture was stirred at room temperature for 2 hours. Then, 31 ml of a toluene solution (Al 1.03 moles/  
35 liter) of aluminoxane as catalyst component (B) was added, and the mixture was stirred at room temperature

- 31 -

for 30 minutes. Subsequently, toluene was removed from the solution at room temperature by means of an evaporator to give a solid catalyst component containing 0.14 % by weight of Zr and 22 % by weight of Al. The  
5 solid catalyst component had an average particle diameter of  $83\ \mu\text{m}$ , and a specific surface area of  $207\ \text{m}^2/\text{g}$ .

#### Preliminary Polymerization

A gaseous mixture of ethylene and nitrogen (20 liters/hr and 30 liters/hr, respectively) was passed  
10 through the solid catalyst component prepared as above for 30 minutes at room temperature to pre-polymerize ethylene. Ethylene polymerized in an amount of 0.62 g per gram of the solid catalyst component.

#### Main Polymerization

15 One liter of hexane was introduced into a 2-liter stainless steel autoclave fully purged with nitrogen, and the temperature was raised to  $45\ ^\circ\text{C}$ . Then, the solid catalyst component subjected to the preliminary polymerization was charged into the autoclave  
20 in an amount of 0.015 milligram-atom calculated as the zirconium atoms, and the temperature was raised to  $60\ ^\circ\text{C}$ . Subsequently, ethylene was introduced and the total pressure was set at  $6\ \text{kg}/\text{cm}^2\text{-G}$ . Its polymerization was started, and then continued at  $70\ ^\circ\text{C}$  for 2  
25 hours while maintaining the total pressure at  $6\ \text{kg}/\text{cm}^2\text{-G}$  by supplying ethylene alone. After the polymerization, the polymer slurry was separated by filtration, and dried overnight at  $80\ ^\circ\text{C}$ . under reduced pressure. There was obtained 85.9 g of a polymer having an MFR of 0.03 g/10  
30 min., an  $\bar{M}_w/\bar{M}_n$  of 2.65 and a bulk density of  $0.36\ \text{g}/\text{cm}^3$ . No adhesion of the polymer to the wall of the autoclave was observed.

#### Example 2

##### Preparation of a zirconium catalyst

35 2.3 g of calcined silica obtained by calcining silica (average particle diameter  $70\ \mu\text{m}$ , specific surface



- 32 -

area  $260 \text{ m}^2/\text{g}$ , pore volume  $1.65 \text{ cm}^3/\text{g}$ ) at  $300^\circ \text{C}$  for 4 hours, 4.8 ml of a toluene solution (Zr 0.01 mole/liter) of biscyclopentadienyl zirconium dichloride and 30 ml of a toluene solution (Al 1.03 mole/liter) of the aluminoxane synthesized in Example 1 were introduced into a 200 ml fully nitrogen-purged flask. The mixture was stirred at room temperature for 30 minutes. Subsequently, the toluene was removed from the solution at room temperature by an evaporator to give a solid catalyst component containing 0.11 % by weight of Zr and 20 % by weight of Al. The solid catalyst component had an average particle diameter of  $78 \mu\text{m}$  and a specific surface area of  $210 \text{ m}^2/\text{g}$ .

#### Preliminary Polymerization

A gaseous mixture of ethylene and nitrogen (20 liters/hr and 30 liters/hr respectively) was passed at room temperature for 30 minutes through the solid catalyst component obtained as above to pre-polymerize ethylene. Ethylene polymerized in an amount of 0.51 g per gram of the solid catalyst component.

#### Main Polymerization

The same polymerization as in Example 1 was carried out to give 102.5 g of a polymer having an MFR of 0.05 g/10 min., an  $\bar{M}_w/\bar{M}_n$  of 2.73 and a bulk density of  $0.35 \text{ g/cm}^3$ . No adhesion of the polymer to the autoclave wall was observed.

#### Example 3

##### Preparation of a zirconium catalyst

A solid catalyst component containing 0.22 % by weight of Zr and 21 % by weight of Al was obtained by repeating Example 2 except that 1.9 g of silica, 8.0 ml of a toluene solution (Zr 0.01 mole/liter) of biscyclopentadienyl zirconium dichloride and 25 ml of a toluene solution (Al 1.03 mole/liter) of aluminoxane synthesized in Example 1 were used. The resulting solid catalyst component had an average particle diameter of  $78 \mu\text{m}$  and a specific surface area of  $220 \text{ m}^2/\text{g}$ .

- 33 -

Preliminary Polymerization

Prepolymerization was carried out in the same way as in Example 1 to give a solid catalyst which catalyzed polymerization of 0.49 g of ethylene per gram thereof.

Main Polymerization

Example 1 was repeated to give 26.3 g of a polymer having an MFR of 0.02 g/10 min., an  $\bar{M}_w/\bar{M}_n$  of 2.80 and a bulk density of 0.37 g/cm<sup>3</sup>. No adhesion of the polymer to the wall of the autoclave was observed.

Example 4Preparation of a zirconium catalyst

5.8 g of calcined alumina obtained by calcining alumina (average particle diameter 60  $\mu$ m, specific surface area 290 m<sup>2</sup>/g, pore volume 1.05 ml/g) at 500 °C for 5 hours, 17 ml of a toluene solution (Al 1 mole/liter) of dimethylaluminum monochloride and 50 ml of toluene were introduced into a 200 ml flask fully purged with nitrogen, and heated at 80 °C for 2 hours. Then, the reaction mixture was subjected to solid-liquid separation by filtration, and the solid portion was transferred into 50 ml of toluene. Furthermore, 32 ml of a toluene solution (Zr 0.036 mole/liter) of biscyclopentadienyl zirconium chloride was added, and the mixture was heated at 80 °C for 1 hour. The reaction mixture was subjected to solid-liquid separation by filtration to give a solid catalyst containing 0.25 % by weight of Zr. The above solid portion had an average particle diameter of 69  $\mu$ m and a specific surface area of 240 m<sup>2</sup>/g.

Preliminary Polymerization

The solid catalyst obtained as above (0.015 mg-atom as Zr), 4.9 ml of a toluene solution (Al 1.03 mole/liter) of the aluminosilane synthesized in Example 1 and 20 ml of toluene were stirred at room temperature for 30 minutes, and then toluene was removed at room temperature by an evaporator.

- 34 -

The resulting solid catalyst was subjected to preliminary polymerization in the same way as in Example 1. Ethylene polymerized in an amount of 0.32 g per gram of the solid catalyst.

5        Main Polymerization

Sodium chloride (special reagent grade, Wako Pure Chemicals, Co., Ltd.; 250 g) was introduced into a 2-liter stainless steel autoclave fully purged with nitrogen, and dried at 90 °C under reduced pressure for 10 1 hour. Thereafter, the inside of the autoclave was purged with ethylene, and the temperature was raised to 75 °C. Subsequently, all the catalyst subjected to preliminary polymerization was charged into the autoclave, and ethylene was introduced. The total pressure 15 was adjusted to 8 kg/cm<sup>2</sup>-G, and the polymerization of ethylene was started. Thereafter, the polymerization was carried out at 80 °C for 1 hour while maintaining the total pressure at 8 kg/cm<sup>2</sup>-G by supplying ethylene alone. After the polymerization, sodium chloride was 20 removed by washing with water, and the remaining polymer was washed with hexane and then dried overnight at 80 °C under reduced pressure. There was obtained 32.2 g of a polymer having an MFR of 0.10 g/10 min., an  $\bar{M}_w/\bar{M}_n$  of 2.79 and a bulk density of 0.40 g/cm<sup>3</sup>. No adhesion 25 of the polymer to the wall of the autoclave was observed.

Example 5

Main Polymerization

Ethylene and 1-hexene were copolymerized under a total pressure of 7 kg/cm<sup>2</sup>-G using 900 ml of hexane 30 and 100 ml of 1-hexene. Otherwise, Example 1 was repeated to give 110 g of a polymer having an MFR of 0.12 g/10 min., an  $\bar{M}_w/\bar{M}_n$  of 2.80, a bulk density of 0.34 g/cm<sup>3</sup>, a density of 0.915 g/cm<sup>3</sup> and a weight fraction of a portion soluble in decane at room temperature 35 of 0.25 % by weight. Hardly any adhesion of the polymer to the wall of the autoclave was observed.

Comparative Example 1

The catalyst preparation and polymerization were carried out in the same way as in Example 2 except that the preliminary polymerization was not carried out.

- 5 There was obtained 95.9 g of a polymer having an MFR of 0.002 g/10 min., an  $\bar{M}_w/\bar{M}_n$  of 2.91 and a bulk density of 0.07 g/cm<sup>3</sup>. Considerable adhesion of the polymer to the wall of the autoclave was observed.

Example 6

- 10 Preparation of a zirconium catalyst

- 2.3 g of calcined silica obtained by calcining silica (average particle diameter 70  $\mu$ m, specific surface area 260 m<sup>2</sup>/g, pore volume 1.65 cm<sup>3</sup>/g) at 300 °C for 4 hours, 15 ml of a toluene solution (Al 1 mole/liter) of dimethylaluminum monochloride, and 50 ml of toluene were introduced into a 200 ml fully nitrogen-purged flask, and heated at 80 °C for 2 hours. Subsequently, the reaction mixture was subjected to solid-liquid separation by filtration, and the solid portion was transferred into 50 ml of toluene. Then, 6.4 ml of a toluene solution (0.01 mole-Zr/liter of solution) of bis(cyclopentadienyl)zirconium dichloride was added. The mixture was stirred at room temperature for 2 hours and then subjected to solid-liquid separation by filtration. The solid portion was suspended in 100 ml of n-decane. While the suspension was stirred, 31 ml of a toluene solution (2.3 moles-Al/liter of solution) of aluminoxane was added. The mixture was warmed to 35 °C, and the pressure of the inside of the reactor was reduced to 4 torr to evaporate the toluene. The reaction suspension was filtered at -20 °C. The solid portion was collected and suspended in 50 ml of n-decane. The resulting solid catalyst had an average particle diameter of 78  $\mu$ m and a specific surface area of 226 m<sup>2</sup>/g.

- 36 -

Preliminary Polymerization

A 400 ml reactor equipped with a stirrer was charged with 100 ml of purified n-decane and 0.1 mg-atom, as Zr, of the above solid catalyst in an atmosphere of nitrogen, and then ethylene was fed into the reactor for 1 hour at a rate of 4 Nl/hour. During this time, the temperature was maintained at 20 °C. After the feeding of ethylene, the inside of the reactor was purged with nitrogen, and the reaction mixture was washed once with purified hexane, and suspended in hexane. The catalyst was thus stored in a catalyst bottle.

Main polymerization

Sodium chloride as a dispersant was added in an amount of 250 g/cm<sup>3</sup> to a 2-liter autoclave purged fully with nitrogen, and while the autoclave was heated at 90 °C, pressure reduction treatment was carried out for 2 hours using a vacuum pump so that the pressure of the inside of the autoclave was below 50 mmHg. Then, the temperature of the autoclave was lowered to 75 °C, and the inside of the autoclave was purged with ethylene. The solid catalyst component subjected to prepolymerization was added in an amount of 0.007 millimole as Zr, and the autoclave was sealed up. Hydrogen (50 Nml) was added, and ethylene was introduced so that the inside pressure of the autoclave reached 8.0 kg/cm<sup>2</sup>-G. The stirring speed was raised to 300 rpm, and the polymerization was carried out at 80 °C for 1 hour.

After the polymerization, all the polymer and sodium chloride in the autoclave were taken out and fed into about 1 liter of water. By stirring for about 5 minutes, almost all sodium chloride dissolved in water and only the polymer came afloat on the water surface. The floating polymer was recovered, washed thoroughly with methanol, and dried overnight at 80 °C under reduced pressure. The amount of the polymer yielded was 106.2 g/cm<sup>3</sup>. It had an MFR of 2.1 dg/min. and

- 37 -

an apparent bulk density of 0.46 g/ml. The amount of a fine powdery polymer having a particle size of less than 105  $\mu\text{m}$  was 0.1 % by weight of the total amount of the polymerization product. On the other hand, no coarse  
5 polymer having a size of more than 1120  $\mu\text{m}$  was seen to form. The  $\bar{M}_w/\bar{M}_n$ , determined by GPC measurement, was 3.0.

#### Comparative Example 2

Catalyst preparation and polymerization were carried out in the same way as in Example 6 except that  
10 no preliminary polymerization as in Example 6 was carried out. There was obtained 63.3 g of a polymer having an MFR of 3.6 dg/min. and an apparent density of 0.28 g/ml. The amount of a fine powdery polymer having a size of less than 105  $\mu\text{m}$  was 7.6 % by weight based on the total  
15 amount of the polymerization product.

#### Example 7

##### Preparation of a zirconium catalyst

67 ml of a toluene solution containing 100 millimoles, as the Al atoms, of the aluminoxane and 2 g  
20 of a polyethylene powder having an average particle diameter of 35  $\mu\text{m}$  (MIPERON<sup>®</sup>, a trademark for a product of Mitsui Petrochemical Industries, Ltd.) were charged into a 300 ml pressure-reducible reactor equipped with a stirrer, and with stirring at room temperature, 100 ml of  
25 purified n-decane was added over the course of about 0.5 hour, whereupon the aluminoxane was precipitated. Then, the temperature of the inside of the reactor was raised to 35 °C over the course of about 3 hours while the pressure of the inside of the reactor was reduced to 4  
30 torr by means of a vacuum pump. Consequently, the toluene in the reactor was removed, and the aluminoxane was further precipitated. The reaction solution was filtered by a filter, and the liquid portion was removed. The solid portion was suspended in n-decane, and 5 ml of  
35 a toluene solution containing 0.2 millimole of bis(cyclopentadienyl)zirconium chloride was added. They were

- 38 -

mixed at room temperature for about 1 hour, and the liquid portion was removed by a filter. Thus, a solid catalyst for olefin polymerization was formed.

The Zr content of the resulting solid catalyst was 9 millimoles per 100 g of the polyethylene used as a carrier, and its Al content was 2.0 moles per 100 g of the polyethylene carrier. The average catalyst particle diameter of the catalyst determined by microscopic observation was about  $40\ \mu\text{m}$ , and it had a specific surface area of  $143\ \text{m}^2/\text{g}$ . Prepolymerization and vapor-phase polymerization of ethylene were carried out by the same operations as in Example 6. There was obtained 128.2 g of a polymer having an MFR of 1.6 dg/min. and an apparent bulk density of 0.46 g/ml. The amount of a fine powdery polymer having a particle diameter of less than  $105\ \mu\text{m}$  was 0.1 % by weight based on the total amount of the polymerization product. The  $\bar{M}_w/\bar{M}_n$  determined by GPC measurement was 2.6.

#### Example 8

A solid catalyst was prepared in the same way as in Example 7 except that 2 liters of spherical polystyrene particles having a particle diameter of about  $30\ \mu\text{m}$  (#200 to #400, a product of Eastman Kodak Co.) was used instead of the polyethylene carrier. Preliminary polymerization and vapor-phase polymerization of ethylene were carried out as in Example 7. The resulting solid catalyst had an average particle diameter of  $35\ \mu\text{m}$  and a specific surface area of  $143\ \text{m}^2/\text{g}$ . As a result, there was obtained 110.6 g of a polymer having an MFR of 3.6 dg/min. and an apparent bulk density of 0.44 g/ml. The amount of a fine powdery polymer having a particle diameter of less than  $105\ \mu\text{m}$  was 0.2 % by weight based on the total amount of the polymerization product.

Example 9Preparation of a solid catalyst component  
(zirconium catalyst)

5.2 g of calcined silica obtained by calcining silica (average particle diameter  $70\text{ }\mu\text{m}$ , specific surface area  $260\text{ m}^2/\text{g}$ , pore volume  $1.65\text{ cm}^3/\text{g}$ ) at  $700\text{ }^\circ\text{C}$  for 5 hours, 26 ml of a toluene solution (Al 1 mole/liter) of diethylaluminum monochloride and 50 ml of toluene were introduced into a 200 ml flask fully purged with nitrogen, and heated at  $80\text{ }^\circ\text{C}$  for 2 hours. The reaction mixture was then subjected to solid-liquid separation by filtration to obtain a catalyst component. The catalyst component was transferred into 50 ml of toluene, and 43 ml of a toluene solution (Zr 0.04 mole/liter) of bis(cyclopentadienyl)zirconium chloride as another catalyst component was added, and the mixture was heated at  $80\text{ }^\circ\text{C}$  for 1 hour. The reaction mixture was subjected to solid-liquid separation by filtration to obtain a solid catalyst component (A') having 0.012 mg-atom and 1.12 mg-atom of Al supported per gram of silica. The solid catalyst component (A') in an amount of 0.015 mg-atom, as Zr, was added to 4.9 ml of a toluene solution (Al 1.03 moles/liter) of aluminoxane as catalyst component (B) and 20 ml of toluene, and the mixture was stirred at room temperature for 30 minutes. Then, the toluene was removed from the mixture by an evaporator to give a solid catalyst component containing 0.08 % by weight of Zr and 10 % by weight of Al.

Polymerization

250 g of sodium chloride (special reagent grade, Wako Pure Chemical Co., Ltd.) was introduced into a 2-liter stainless steel autoclave fully purged with nitrogen, and dried at  $90\text{ }^\circ\text{C}$  for 1 hour under reduced pressure. Thereafter, the inside of the autoclave was purged with ethylene, and the temperature was adjusted to  $75\text{ }^\circ\text{C}$ . Subsequently, all the catalyst prepared as



- 40 -

above was introduced. Ethylene was introduced, and under a total pressure of  $8 \text{ kg/cm}^2\text{-G}$ , its polymerization was started. Thereafter, only ethylene was supplied, and the polymerization was carried out at  $80^\circ\text{C}$  for 1 hour while the total pressure was maintained at  $8 \text{ kg/cm}^2\text{-G}$ . After the polymerization, sodium chloride was removed by washing with water. The remaining polymer was washed with hexane, and dried overnight at  $80^\circ\text{C}$  under reduced pressure. There was obtained 72 g of a polymer having an MFR of 0.07 g/10 min., an  $\bar{M}_w/\bar{M}_n$  of 2.64 and a bulk density of  $0.36 \text{ g/cm}^3$ . No adhesion of the polymer to the wall of the autoclave was observed.

#### Example 10

##### Preparation of a solid catalyst component (zirconium catalyst)

5.8 g of calcined alumina obtained by calcining alumina (average particle diameter  $60 \mu\text{m}$ , specific surface area  $270 \text{ m}^2/\text{g}$ , pore volume  $1.05 \text{ cm}^3/\text{g}$ ) at  $500^\circ\text{C}$  for 5 hours, 17 ml of a toluene solution (Al 1 mole/liter) of dimethylaluminum monochloride and 50 ml of toluene were added to a 200 ml flask purged fully with nitrogen, and the mixture was heated at  $80^\circ\text{C}$  for 2 hours. The reaction mixture was then subjected to solid-liquid separation by filtration. The solid portion was transferred into 50 ml of toluene, and 32 ml of a toluene solution (Zr 0.036 mole/liter) of bis(cyclopentadienyl)-zirconium chloride was added. The mixture was heated at  $80^\circ\text{C}$  for 1 hour. The reaction mixture was subjected to solid-liquid separation by filtration to obtain a solid component containing 0.25 % by weight of Zr. This solid component was reacted with aluminoxane in the same way as in Example 9 to give a solid catalyst component containing 0.16 % by weight of Zr.

##### Polymerization

The same polymerization as in Example 9 was carried out using 0.015 mg-atom, as Zr atom, of the above

solid catalyst. There was obtained 42 g of a polymer having an MFR of 0.09 g/10 min., an  $\bar{M}_w/\bar{M}_n$  of 2.77 and a bulk density of 0.35 g/cm<sup>3</sup>. No adhesion of the polymer to the wall of the autoclave was observed.

5 Example 11

Preparation of a solid catalyst component  
(zirconium catalyst)

2.3 g of calcined silica obtained by calcining silica (average particle diameter 70  $\mu$ m, specific surface area 260 m<sup>2</sup>/g, pore volume 1.65 cm<sup>3</sup>/g) at 300 °C for 4 hours, 15 ml of a toluene solution (Al 1 mole/liter) of dimethylaluminum monochloride and 50 ml of toluene were introduced into a 200 ml flask purged with nitrogen, and heated at 80 °C for 2 hours. The re-  
15 action mixture was subjected to solid-liquid separation by filtration. The solid portion was transferred into 50 ml of toluene, and 6.4 ml of a toluene solution (Zr 0.01 mole/liter) of bis(cyclopentadienyl)zirconium chloride was added. The mixture was stirred at room  
20 temperature for 2 hours. Then, 31 ml of a toluene solution (Al 1.03 mole/liter) of the aluminosilane synthesized in Example 9 was added, and the mixture was stirred at room temperature for 30 minutes. The reaction mixture was worked up as in Example 9 to give a solid titanium  
25 component containing 0.14 % by weight of Zr and 22 % by weight of Al.

Polymerization

The same polymerization as in Example 9 was carried out using 0.015 mg-atom, as Zr, of the above  
30 solid catalyst. There was obtained 70 g of a polymer having an MFR of 0.12 g/10 min., an  $\bar{M}_w/\bar{M}_n$  of 2.67, and a bulk density of 0.38 g/cm<sup>3</sup>. No adhesion of the polymer to the wall of the autoclave was noted.

Comparative Example 3

35 Catalyst preparation and polymerization were carried out in the same way as in Example 9 except that

- 42 -

silica was not treated with dimethylaluminum monochloride. There was obtained 21 g of a polymer having an MFR of 0.02 g/10 min., an  $\bar{M}_w/\bar{M}_n$  of 2.89 and a bulk density of 0.15 g/cm<sup>3</sup>.

5           The solid catalyst component used in the polymerization contained 0.35 % by weight of Zr and 35 % by weight of Al.

Example 12

10           Preparation of a solid catalyst component (zirconium catalyst)

Example 9 was repeated except that 6 millimoles of triethyl aluminum instead of dimethyl aluminum monochloride was added to 1 g of silica calcined at 800 °C for 12 hours and reacted at 50 °C for 2 hours, and that 15 0.042 millimole of biscyclopentadienyl zirconium dichloride per gram of silica was added and reacted at room temperature for 2 hours. There was obtained a solid catalyst component having  $6.7 \times 10^{-3}$  milligram-atom of zirconium supported per gram of silica.

20           Polymerization

Polymerization was carried out in the same way as in Example 9 except that 15 milligram-atom, as aluminum atom, of aluminoxane, and 0.015 milligram-atom, as zirconium atom, of the solid catalyst component prepared 25 above were introduced, and furthermore, 50 ml of hydrogen was added. There was obtained 69 g of a polymer having an MFR of 24 g/10 min., an  $\bar{M}_w/\bar{M}_n$  of 2.70 and a bulk density of 0.31 g/cm<sup>3</sup>.

Adhesion of the polymer to the autoclave wall 30 was hardly observed.

Example 13

Preparation of a solid catalyst component (Zr catalyst)

Example 12 was repeated except that diethyl 35 aluminum monochloride was used instead of triethyl aluminum. A solid catalyst component having  $5.7 \times 10^{-3}$

milligram-atom of zirconium supported on it per gram of silica was obtained.

#### Polymerization

Polymerization was carried out as in Example 12 to give 71 g of a polymer having an MFR of 9.5 g/10 min., an  $\bar{M}_w/\bar{M}_n$  of 2.59 and a bulk density of 0.34 g/cm<sup>3</sup>. Adhesion of the polymer to the autoclave wall was hardly observed.

#### Example 14

#### 10 Polymerization

Example 9 was repeated except that 10 ml of hexene-1 was added, and the polymerization was carried out at 70 °C for 0.5 hour. There was obtained 42 g of a polymer having an MRF of 2.05 g/10 min., an  $\bar{M}_w/\bar{M}_n$  of 2.84, a bulk density of 0.31 g/cm<sup>3</sup>, a density of 0.926 g/cm<sup>3</sup> and a weight fraction of a decane-soluble portion of 0.15 % by weight.

Adhesion of the polymer to the autoclave wall was hardly observed.

#### 20 Example 15

#### Preparation of a solid catalyst component (A)

In a 400 ml glass flask equipped with a stirrer and fully purged with nitrogen, a mixed suspension composed of 3 g of silica (#952 made by Davison Co.) calcined for 12 hours at 300 °C and 50 ml of trichlorosilane was reacted at 50 °C for 2 hours with stirring. After the reaction, the liquid portion was removed from the reaction mixture by using a filter, and the remaining solid portion was suspended in 50 ml of toluene. To the suspension was added 300 ml of toluene containing 15 millimoles of bis(cyclopentadienyl)zirconium dichloride at 25 °C. The mixture was reacted at 50 °C for 2 hours with stirring. After the reaction, the liquid portion was removed from the suspension by using a filter. The remaining solid portion was washed twice with toluene to give a solid catalyst component (A).

- 44 -

The amount of zirconium supported on the catalyst component (A) was 1.4 % by weight.

Polymerization

Sodium chloride (250 g) as a dispersant was added to a 2-liter autoclave fully purged with nitrogen. While the autoclave was heated to 90 °C, the inside of the autoclave was subjected to a pressure reduction treatment for 2 hours using a vacuum pump so that the inside pressure of the autoclave became 50 mmHg or below. The temperature of the autoclave was then lowered to 75 °C, and the inside of the autoclave was replaced by ethylene. Then, 0.13 millimole of aluminoxane was added, and the mixture was stirred for 2 minutes at a rotating speed of 50 rpm. Thereafter, 0.87 millimole of aluminoxane and 0.015 millimole, as zirconium atom, of the solid catalyst component were added, and the autoclave was sealed up. Hydrogen (20 Nml) was added and the autoclave was pressurized with ethylene so that the pressure of the inside of the autoclave reached 8 kg/cm<sup>2</sup>-G. The stirring speed was increased to 300 rpm, and the polymerization was carried out at 80 °C for 1 hour.

After the polymerization, all the polymer and sodium chloride in the autoclave were taken out and put in about 1 liter of water. The mixture was stirred for about 5 minutes to dissolve almost all sodium chloride in water. As a result, only the polymer came afloat on the water surface. The floating polymer was recovered, fully washed with methanol, and dried overnight at 80 °C under reduced pressure. The amount of the polymer yielded was 48.3 g, and the polymer had an MFR of 13 and an apparent bulk density of 0.42 g/ml. A fine powdery polymer having a size of not more than 105 micrometers and a coarse polymer having a size of at least 1120 micrometers were not observed. The polymer had an  $\bar{M}_w/\bar{M}_n$  of 2.7.

Examples 16 to 19

Ethylene was polymerized in the same way as in Example 15 except that each of the silane compounds indicated in Table 1 was used instead of the trichloro-  
5 silane used in preparing the solid catalyst component in Example 15. The results are shown in Table 1.

Example 20

A solid catalyst component was prepared, and ethylene was polymerized, as in Example 15 except that  
10 the amount of trichlorosilane used to treat silica was changed from 50 ml to 10 ml in the preparation of the solid catalyst component in Example 15. The results are shown in Table 2.

Example 21

15 A solid catalyst component was prepared, and ethylene was polymerized, as in Example 20 except that the amount of bis(cyclopentadienyl)zirconium dichloride used in the preparation of the solid catalyst component in Example 20 was changed from 15 millimoles to 3 milli-  
20 moles, and the amount of toluene at this time was changed from 300 ml to 60 ml. The results are shown in Table 2.

Example 22

Ethylene was polymerized as in Example 15 except that chlorinated aluminoxane was used instead of  
25 the aluminoxane used at the time of polymerization in Example 15. The results are shown in Table 2. The chlorinated aluminoxane was prepared by the following method.

Aluminoxane-III

30 This compound was synthesized as in the synthesis of aluminoxane-I except that in the synthesis of aluminoxane-I, the amount of trimethyl aluminum was changed from 50 ml to 24.7 ml and 25.3 ml of dimethyl aluminum chloride was simultaneously added dropwise.  
35 The aluminoxane had an average degree of polymerization of 12.

Example 23

Polymerization was carried out in the same way as in Example 15 except that in Example 15, a gaseous mixture of butene-1 and ethylene containing 9.5 mole % of butene-1 was used instead of ethylene alone, and the polymerization temperature was changed from 80 °C to 70 °C. The results are shown in Table 3.

Comparative Example 4

An  $\text{MgCl}_2$ -supported Ti catalyst component prepared in accordance with the method of Example 1 of Japanese Laid-Open Patent Publication No. 811/1981 was used. Polymerization was carried out in the same way as in Example 15 except that aluminoxane described under the heading Polymerization in Example 15 was replaced by triethyl aluminum, and the same gaseous mixture of butene-1 and ethylene containing 9.5 mole % of butene-1 as used in Example 23 was used, and the polymerization temperature was changed from 80 °C to 70 °C. The results are shown in Table 3.

Table 1

Example	Si compound	Amount of Zr supported (wt.%)	Polymerization activity (g-PE/mM-Ti)	Bulk density (g/ml)	Particle size distribution (wt.%)	
					105 $\mu$ m and below	1120 $\mu$ m and above
15	HSiCl <sub>3</sub>	1.2	3,200	0.42	0	0
16	SiCl <sub>4</sub>	1.3	3,100	0.42	0.1	0
17	HMeSiCl <sub>2</sub>	0.9	2,700	0.40	0.1	0
18	HPhSiCl <sub>2</sub>	0.7	2,000	0.39	0.1	0.1
19	MeSiCl <sub>2</sub>	1.4	2,600	0.39	0	0



Table 2

Example	Amount of Zr supported (wt.%)	Polymerization activity (g-PE/mm-Ti)	Bulk density (g/ml)	Particle size distribution (wt.%)	
				105 $\mu$ m and below	1120 $\mu$ m and above
20	1.0	3,000	0.42	0	0
21	0.3	4,300	0.41	0.1	0
22	-	2,100	0.41	0.2	0

Table 3

Run	Polymerization activity (g-PE/mm-Metal)	MFR (dg/min)	Bulk density (g/ml)	Density (g/ml)	Amount of the decane-soluble component (wt.%)	$\bar{M}_w/\bar{M}_n$
Example 23	3,300	11.0	0.38	0.919	3.0	2.7
Comparative Example 4	5,200	3.0	0.30	0.918	6.4	4.7

Example 24Synthesis of aluminoxane

## Aluminoxane-I:-

5  $\text{Al}_2(\text{SO}_4)_3 \cdot 14\text{H}_2\text{O}$  (37 g) and 125 ml of toluene were put in a 400 ml glass flask equipped with a stirrer and purged fully with nitrogen, and cooled to 0 °C. Then, 125 ml of toluene containing 50 ml of trimethyl aluminum was added dropwise over 1 hour. The mixture was heated to 40 °C over 2 hours and the reaction was  
10 continued at this temperature for 10 hours. After the reaction, the reaction mixture was subjected to solid-liquid separation by filtration. Low-boiling materials were removed from the separated liquid by means of an evaporator. Toluene was added to the remaining viscous  
15 liquid and the toluene solution was collected. The resulting aluminoxane had a molecular weight, determined from its freezing point depression in benzene, of 885 and an average degree of polymerization of 15.

## Aluminoxane-II:-

20 The synthesis of aluminoxane-I was repeated except that the reaction time at 40 °C was changed from 10 hours to 2 hours. The resulting aluminoxane had a degree of polymerization of 6.

Preparation of a solid catalyst component  
(Zr catalyst)

25

In a 400 ml glass flask equipped with a stirrer and purged fully with nitrogen, a solution of 2 millimoles of aluminoxane (I) in 50 ml of toluene was added at room temperature to a suspension composed of 5 g of  
30 silica (#952 produced by Davison Co.) calcined at 800 °C for 12 hours and 100 ml of toluene. The mixture was heated to 50 °C and reacted at 50 °C for 2 hours. After the reaction, the liquid portion was removed from the reaction mixture by using a filter. The remaining  
35 solid portion was suspended in 100 ml of toluene. To the suspension was added 9.4 ml of toluene containing 0.38

- 51 -

millimole of bis(cyclopentadienyl)zirconium dichloride at 25 °C, and the mixture was reacted at 25 °C for 2 hours. After the reaction, the liquid portion was removed from the suspension by using a filter. The remaining solid  
5 portion was washed twice with toluene to give a solid catalyst component. The catalyst component had 0.6 % by weight of zirconium supported on it.

#### Polymerization

Sodium chloride (250 g) as a dispersing agent  
10 was added to a 2-liter autoclave purged fully with nitrogen, and while the autoclave was heated at 90 °C, it was subjected to a pressure reduction treatment for 2 hours by means of a vacuum pump so that the inside pressure of the autoclave became 50 mmHg or below. The  
15 temperature of the autoclave was then lowered to 75 °C, and the inside of the autoclave was replaced by ethylene. 0.13 millimole of aluminoxane (aluminoxane-II) was then added, and the mixture was stirred at a speed of 50 rpm for 2 minutes. Thereafter, 0.87 millimole of aluminoxane  
20 (aluminoxane-I) and 0.015 millimole, as zirconium atom, of the solid catalyst component were added. The autoclave was sealed up. Hydrogen (20 Nml) was added and the inside of the autoclave was pressurized with ethylene so that the inside pressure became 8 kg/cm<sup>2</sup>-G. The stirring  
25 speed was increased to 300 rpm, and the polymerization was carried out at 80 °C for 1 hour.

After the polymerization, all the polymer and sodium chloride in the autoclave were taken out, and put in about 1 liter of water. The mixture was stirred for  
30 about 5 minutes to dissolve almost all the sodium chloride. Only the polymer came afloat on the water surface. The floating polymer was recovered, washed fully with methanol, and dried overnight at 80 °C under reduced pressure. The amount of the polymer yielded was  
35 82.1 g. The polymer had an MFR of 7.9 and an apparent bulk density of 0.43 g/ml. The amount of a fine powdery

- 52 -

polymer having a size of not more than 105 micrometers was 0.1 % by weight of the entire polymerization product. A coarse polymer having a size of at least 1120 micrometers was not observed. The  $\bar{M}_w/\bar{M}_n$  of the polymer was 2.7.

5 The results are shown in Table 4.

Example 25

A solid catalyst component was prepared, and ethylene was polymerized, in the same way as in Example 24 except that in the preparation of the solid catalyst  
10 component in Example 24, the amount of aluminoxane used to treat silica was changed from 2 millimoles to 10 millimoles. The results are shown in Table 4.

Examples 26 and 27

A solid catalyst component (A) was prepared,  
15 and ethylene was polymerized, in the same way as in Example 24 except that in the preparation of the solid catalyst component in Example 24, the temperature at which the reaction of supporting cyclopentadienyl zirconium dichloride was carried out in the preparation  
20 of the solid catalyst component in Example 24 was changed to 50 and 80 °C respectively from 25 °C. The results are shown in Table 4.

Example 28

A solid catalyst component was prepared, and  
25 ethylene was polymerized, in the same way as in Example 24 except that in the preparation of the solid catalyst component in Example 24, aluminoxane-II was used instead of the aluminoxane-I. The results are shown in Table 4.

Example 29

30 Ethylene was polymerized in the same way as in Example 24 except that aluminoxane-II was used instead of the aluminoxane-I at the time of polymerization in Example 24. The results are shown in Table 4.

Example 30

35 Polymerization was carried out in the same way as in Example 24 except that a gaseous mixture of butene-1

- 53 -

and ethylene containing 9.5 mole % of butene-1 was used instead of ethylene, and the polymerization temperature was changed from 80 °C to 70 °C. The results are shown in Table 5.

Table 4

Example	Polymerization activity (g-PE/mM-Zr)	MFR (dg/min)	Apparent bulk density (g/ml)	Particle size distribution (wt.%)	
				105 $\mu$ m and below	1120 $\mu$ m and above
24	5,500	7.9	0.43	0.1	0
25	4,800	12	0.43	0.1	0
26	5,400	13	0.42	0.1	0.1
27	5,000	17	0.43	0.1	0
28	4,900	6.1	0.43	0	0
29	3,800	8.3	0.42	0.1	0

Table 5

Example	Polymerization activity (g-PE/mM-Metal)	MFR (dg/min)	Apparent bulk density (g/ml)	Density (g/ml)	Amount of the decane-soluble portion (wt.%)	$\bar{M}_w/\bar{M}_n$
30	4,900	21	0.39	0.916	2.6	2.6



Example 31Synthesis of aluminoxane

## Halogenated aluminoxane-I:-

This compound was synthesized by the same method as in the synthesis of aluminoxane-I except that in the synthesis of aluminoxane-I, 46 ml of dimethyl aluminum chloride was used instead of 50 ml of trimethyl aluminum. The resulting halogenated aluminoxane had an average degree of polymerization of 11.

## 10 Halogenated aluminoxane-II:-

This compound was synthesized in the same way as in the synthesis of aluminoxane-I except that in the synthesis of aluminoxane-I, the amount of trimethyl aluminum added was changed from 50 ml to 24.7 ml and 25.3 ml of dimethyl aluminum chloride was added dropwise at the same time. This halogenated aluminoxane had a degree of polymerization of 12.

Preparation of a solid catalyst component  
(Zr catalyst)

20 In a 400 ml glass flask equipped with a stirrer and purged fully with nitrogen, 50 ml of toluene solution containing 2 millimoles of halogenated aluminoxane-I was added to a suspension composed of 5 g of silica (#952 produced by Davison Co.) calcined at 800 °C for 12  
25 hours and 100 ml of toluene. The mixture was heated to 50 °C and reacted at 50 °C for 2 hours. After the reaction, the liquid portion was removed from the reaction mixture by using a filter. The remaining solid portion was suspended in 100 ml of toluene. To the  
30 suspension was added 9.4 ml of toluene containing 0.38 millimole of bis(cyclopentadienyl)zirconium dichloride at 25 °C, and the reaction was carried out at 25 °C for 2 hours. After the reaction, the liquid portion was removed from the suspension by using a filter. The  
35 remaining solid portion was washed twice with toluene to give a solid catalyst component having 0.7 % by weight of zirconium supported on it.

- 57 -

Polymerization

Sodium chloride (250 g) as a dispersing agent was added to a 2-liter autoclave purged fully with nitrogen, and while the autoclave was heated at 90 °C, it was subjected to a pressure reduction treatment for 2 hours by means of a vacuum pump so that the inside pressure of the autoclave became 50 mmHg or below. The temperature of the autoclave was then lowered to 75 °C, and the inside of the autoclave was replaced by ethylene. 0.13 millimole of aluminoxane (aluminoxane-I) was then added, and the mixture was stirred at a speed of 50 rpm for 2 minutes. Thereafter, 0.87 millimole of aluminoxane (aluminoxane-I) and 0.015 millimole, as zirconium atom, of the solid catalyst component were added. The autoclave was sealed up. Hydrogen (20 Nml) was added and the inside of the autoclave was pressurized with ethylene so that the inside pressure became 8 kg/cm<sup>2</sup>-G. The stirring speed was increased to 300 rpm, and the polymerization was carried out at 80 °C for 1 hour.

After the polymerization, all the polymer and sodium chloride in the autoclave were taken out, and put in about 1 liter of water. The mixture was stirred for about 5 minutes to dissolve almost all the sodium chloride. Only the polymer came afloat on the water surface. The floating polymer was recovered, washed fully with methanol, and dried overnight at 80 °C under reduced pressure. The amount of the polymer yielded was 93.1 g. The polymer had an MFR of 11.3 and an apparent bulk density of 0.43 g/ml. The amount of a fine powdery polymer having a size of not more than 105 micrometers was 0.1 % by weight of the entire polymerization product. A coarse polymer having a size of at least 1120 micrometers was not observed. The  $\bar{M}_w/\bar{M}_n$  of the polymer was 2.9. The results are shown in Table 6.

Example 32

A solid catalyst component was prepared, and

- 58 -

ethylene was polymerized, in the same way as in Example 31 except that in the preparation of the solid catalyst component in Example 31, the amount of the halogenated aluminoxane-I used to treat silica was changed from 2 millimoles to 10 millimoles. The results are shown in Table 6.

#### Example 33

A solid catalyst component (A) was prepared, and ethylene was polymerized, in the same way as in Example 31 except that in the preparation of the solid catalyst component in Example 31, the temperature employed in the supporting reaction of bis(cyclopentadienyl)zirconium dichloride was changed to 50 °C from 25 °C. The solid catalyst component contained 0.7 % by weight of Zr supported on it. The results are shown in Table 6.

#### Example 34

A catalyst component was prepared, and ethylene was polymerized, in the same way as in Example 31 except that in the preparation of the solid catalyst component in Example 31, the amount of bis(cyclopentadienyl)-zirconium dichloride was changed from 0.38 millimole to 0.75 millimole, and the amount of the toluene solution of the above zirconium compound was changed from 9.4 ml to 18.8 ml. The amount of Zr supported on the solid catalyst component was 1.2 % by weight. The results are shown in Table 6.

#### Example 35

A solid catalyst component was prepared, and ethylene was polymerized, in the same way as in Example 31 except that in the preparation of the solid catalyst component in Example 31, halogenated aluminoxane-II was used instead of the halogenated aluminoxane-I. The results are shown in Table 6.

#### Example 36

Ethylene was polymerized in the same way as in

- 59 -

Example 31 except that halogenated aluminoxane-II was used instead of the aluminoxane-I at the time of polymerization. The results are shown in Table 6.

Example 37

5                    Polymerization was carried out in the same way  
as in Example 31 except that a gaseous mixture of  
1-butene and ethylene having a butene-1 content of 9.5  
mole % was used instead of ethylene alone, and the  
polymerization temperature was changed from 80 °C to  
10 70 °C. The results are shown in Table 7.

Table 6

Example	Polymerization activity (g-PE/mM-Zr)	MFR (dg/min)	Amount bulk density (g/ml)	Particle size distribution (wt.%)	
				105 $\mu\text{m}$ and below	1120 $\mu\text{m}$ and above
31	6,200	11	0.43	0.1	0
32	5,700	17	0.42	0.1	0
33	5,900	10	0.43	0	0
34	4,300	16	0.43	0	0
35	5,200	5	0.43	0	0
36	3,800	6	0.43	0.1	0

Table 7

Example	Polymerization activity (g-PE/mm-Metal)	MFR (dg/min)	Apparent bulk density (g/ml)	Density (g/ml)	Amount of the decane-soluble portion (wt.%)	$\bar{M}_w/\bar{M}_n$
37	5,100	18	0.37	0.918	2.8	2.9

- 62 -

## SCOPE OF CLAIM FOR PATENT

1. A catalyst for polymerization of alpha-olefins, said catalyst being formed by using a solid catalyst comprising

- (A) a solid catalyst component composed of a compound of a transition metal of Group IVB of the periodic table supported on a carrier, and
- (B) an aluminoxane,

in pre-polymerization of an olefin.


2. The catalyst of claim 1 wherein the transition metal is titanium, zirconium or hafnium.

3. The catalyst of claim 1 wherein the transition metal compound is represented by the following formula (I)




wherein  $R^1$  represents a cycloalkadienyl group,  $R^2$ ,  $R^3$  and  $R^4$  are identical or different and each represents a cycloalkadienyl group, an aryl group, an alkyl group, a cycloalkyl group, an aralkyl group, a halogen atom, a hydrogen atom, or a group of the formula  $-OR^a$ ,  $-SR^b$  or  $-NR_2^c$  in which each of  $R^a$ ,  $R^b$  and  $R^c$  represents an alkyl group, a cycloalkyl group, an aryl group, an aralkyl group or an organic silyl group, Me represents zirconium, titanium or hafnium, k is 1, 2, 3 or 4,  $\ell$ , m and n are each 0, 1, 2 or 3, and  $k+\ell+m+n=4$ .

4. The catalyst of claim 1 wherein the aluminoxane is represented by the following formula (II)



- 63 -

wherein R is a hydrocarbon group, X is a halogen atom, and a and b, independently from each other, are numbers of 0 to 80 provided that a and b are not zero simultaneously, or the following formula (III)



wherein R, X, a and b are as defined with regard to formula (II).

5. The catalyst of claim 1 wherein the carrier is treated with an organometallic compound before the transition metal compound is supported on it.
6. The catalyst of claim 1 wherein the organometallic compound is an organoaluminum compound, an organoboron compound, an organomagnesium compound, an organozinc compound or an organolithium compound.
7. The catalyst of claim 1 wherein the carrier is a porous inorganic oxide.
8. A catalyst for polymerization of alpha-olefins, said catalyst comprising
  - (A) a solid catalyst component obtained by supporting a compound of a transition metal of Group IVB of the periodic table on a porous inorganic oxide treated with a compound selected from the group consisting of organometallic compounds, halogen-containing silicon compounds and aluminoxanes, and
  - (B) an aluminoxane.
9. The catalyst of claim 8 wherein the compound for reacting the carrier is an organometallic compound, and the organometallic compound is an organoaluminum



- 64 -

compound, an organoboron compound, an organomagnesium compound, an organozinc compound or an organolithium compound.

10. The catalyst of claim 8 wherein the compound for treating the carrier is a halogen-containing silicon compound represented by the following formulas (IV)



wherein Y is a chlorine or bromine atom,  $\text{R}^5$  and  $\text{R}^6$ , independently from each other, represent a hydrogen atom, an alkyl group having 1 to 12 carbon atoms, an aryl group, or a cycloalkyl group having 3 to 12 carbon atoms, d is a number of 1 to 4, and e is a number of 0 to 4 with the proviso that the total of d and e is a number of 1 to 4.

11. The catalyst of claim 8 wherein the compound for treating the carrier is an aluminoxane of formula (II) or (III) given above.

12. The catalyst of claim 8 wherein the transition metal of the compound to be supported on the carrier is titanium, zirconium or hafnium.

13. The catalyst of claim 8 wherein the transition metal compound supported on the carrier is a compound of formula (I) given above.

14. The catalyst of claim 8 wherein the aluminoxane (B) is represented by formula (II) or (III) given above.

15. A process for polymerizing an alpha-olefin, which comprises homopolymerizing or copolymerizing an alpha-olefin in the presence of the catalyst set forth in any of claims 1 to 14.

16. The process of claim 15 wherein the alpha-olefin has 2 to 20 carbon atoms.

17. The process of claim 15 wherein the alpha-olefin is a mixture of ethylene and an alpha-olefin having 3 to 20 carbon atoms.

## INTERNATIONAL SEARCH REPORT

0279863

International Application No

PCT/JP87/00629

<b>I. CLASSIFICATION OF SUBJECT MATTER</b> (if several classification symbols apply, indicate all) <sup>1</sup>		
According to International Patent Classification (IPC) or to both National Classification and IPC		
Int.Cl <sup>4</sup> C08F10/00, C08F4/64		
<b>II. FIELDS SEARCHED</b>		
Minimum Documentation Searched <sup>5</sup>		
Classification System <sup>1</sup>	Classification Symbols	
IPC	C08F10/00, C08F110/00, C08F4/64, C08F4/66	
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched <sup>6</sup>		
<b>III. DOCUMENTS CONSIDERED TO BE RELEVANT</b> <sup>14</sup>		
Category <sup>7</sup>	Citation of Document, <sup>15</sup> with indication, where appropriate, of the relevant passages <sup>17</sup>	Relevant to Claim No. <sup>18</sup>
X	JP, A, 60-106810 (Idemitsu Kosan Co., Ltd.) 12 June 1985 (12. 06. 85) Claim, page 5, upper left column, lines 13 to 19, page 5, upper right column, 2nd line from the bottom to lower left column, line 4 (Family: none)	8-17
A	JP, A, 58-19309 (Hoechst A.G.) 4 February 1983 (04. 02. 83) Claim & US, A, 4542199	1-17
A	JP, A, 60-35005 (Atkem) 22 February 1985 (22. 02. 85) Claim & US, A, 4536484	1-17
A	JP, A, 60-35006 (Exxon Research & Engineering Co.) 22 February 1985 (22. 02. 85) Claim & EP, A, 128046	1-17
A	JP, A, 60-35007 (Exxon Research & Engineering Co.)	1-17
<sup>14</sup> Special categories of cited documents: <sup>15</sup> <sup>16</sup> "A" document defining the general state of the art which is not considered to be of particular relevance <sup>16</sup> "E" earlier document but published on or after the international filing date <sup>16</sup> "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) <sup>16</sup> "O" document referring to an oral disclosure, use, exhibition or other means <sup>16</sup> "P" document published prior to the international filing date but later than the priority date claimed <sup>16</sup> "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention <sup>16</sup> "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step <sup>16</sup> "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art <sup>16</sup> "Z" document member of the same patent family		
<b>IV. CERTIFICATION</b>		
Date of the Actual Completion of the International Search <sup>1</sup>	Date of Mailing of this International Search Report <sup>1</sup>	
November 13, 1987 (13.11.87)	November 30, 1987 (30.11.87)	
International Searching Authority <sup>1</sup>	Signature of Authorized Officer <sup>10</sup>	
Japanese Patent Office		

## FURTHER INFORMATION CONTINUED FROM THE SECOND SHEET

A	22 February 1985 (22. 02. 85) Claim & EP, A, 129368	
A	JP, A, 60-35008 Exxon Research & Engineering Co.) 22 February 1985 (22. 02. 85) Claim & US, A, 4530914	1-17
A	JP, A, 61-31404 (Hoechst A.G.) 13 February 1986 (13. 02. 86) Claim & EP, A, 170059	1-17
A	JP, A, 61-108610 (Showa Denko Kabushiki Kaisha)	1-17

V. ☐ OBSERVATIONS WHERE CERTAIN CLAIMS WERE FOUND UNSEARCHABLE<sup>10</sup>

This international search report has not been established in respect of certain claims under Article 17(2) (a) for the following reasons:

1. ☐ Claim numbers..... because they relate to subject matter<sup>12</sup> not required to be searched by this Authority, namely:

2. ☐ Claim numbers..... because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out<sup>13</sup>, specifically:

VI. ☐ OBSERVATIONS WHERE UNITY OF INVENTION IS LACKING<sup>11</sup>

This International Searching Authority found multiple inventions in this international application as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims of the international application.

2. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims of the international application for which fees were paid, specifically claims:

3. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claim numbers:

4. ☐ As all searchable claims could be searched without effort justifying an additional fee, the International Searching Authority did not invite payment of any additional fee.

Remark on Protest

☐ The additional search fees were accompanied by applicant's protest.

☐ No protest accompanied the payment of additional search fees.

## FURTHER INFORMATION CONTINUED FROM THE SECOND SHEET

27 May 1986 (27. 05. 86)  
Claim (Family: none)

V. ☐ OBSERVATIONS WHERE CERTAIN CLAIMS WERE FOUND UNSEARCHABLE<sup>11</sup>

This international search report has not been established in respect of certain claims under Article 17(2) (a) for the following reasons:

1. ☐ Claim numbers ..... because they relate to subject matter<sup>12</sup> not required to be searched by this Authority, namely:
2. ☐ Claim numbers ..... because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out<sup>12</sup>, specifically:

VI. ☐ OBSERVATIONS WHERE UNITY OF INVENTION IS LACKING<sup>11</sup>

This international Searching Authority found multiple inventions in this international application as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims of the international application.
2. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims of the international application for which fees were paid, specifically claims:
3. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claim numbers:
4. ☐ As all searchable claims could be searched without effort justifying an additional fee, the international Searching Authority did not invite payment of any additional fee.

## Remark on Protest

- ☐ The additional search fees were accompanied by applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.